

plaber®

 READY

HPRC READY MADE SOLUTIONS – 2025

We are HPRC. We don't just design and manufacture watertight hard protective cases, we supply carrying solutions. And solutions need to be no-hassle and tailored to your needs.

This is why in Autumn 2013 we designed our first case with a foam specially cut to house the DJI Phantom 1.

Now, almost 12 years later, we are a leading manufacturer of custom cases for drones, gimbals, camcorders and cameras but we feel we are still at the beginning: more is yet to come.

MADE IN ITALY

HPRC VECTOR PANEL

The new protective layer system designed for your Ready Case



Made of special PVC based compound, the Vector Panel ensures:

- foam long-last durability and integrity;
- improved protection for the equipment;
- dedicated item slots, suitably marked, avoiding lost tools;
- easy and quick organization of the case;
- savings in space and time;
- professional design and presentation.



The system significantly increases the overall performance and efficiency of the case in any kind of environment, weather conditions and temperature.




DJI

HPRC READY MADE SOLUTIONS – 2025

HPRC2400 for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo

S-MAV3P-2400-02

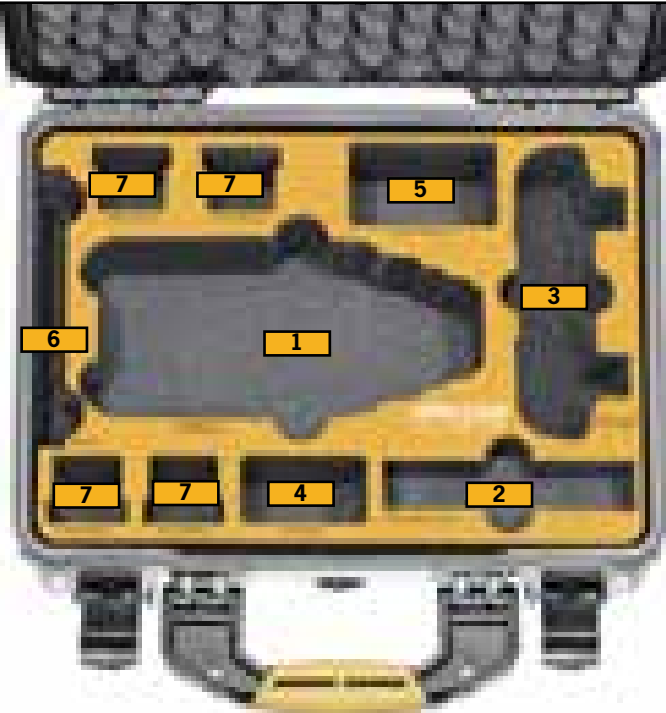

- 1 DJI Mavic 3 Pro Cine Premium Combo or Fly More Combo with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controller
- 4 Portable Charger DJI
- 5 Miscellaneous/Propellers for DJI Mavic 3 series
- 6 ND Filters Set
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
Internal dimension:
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension:
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,17kg - 4.78lbs
with cubed foam: 2,58kg - 5.69lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

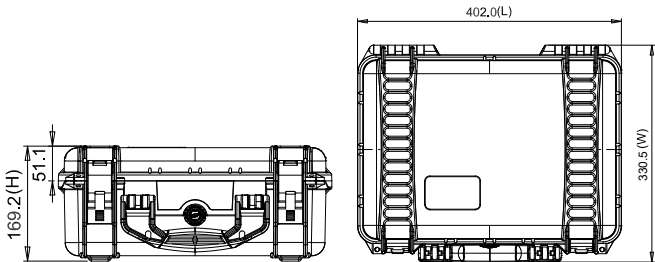

HPRC DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO

HPRC2600 for DJI Mavic 3 Pro Cine Premium Combo Flying Mode & DJI Mini 4 Pro Fly More Combo **S-MAV3PFM-2600-01**

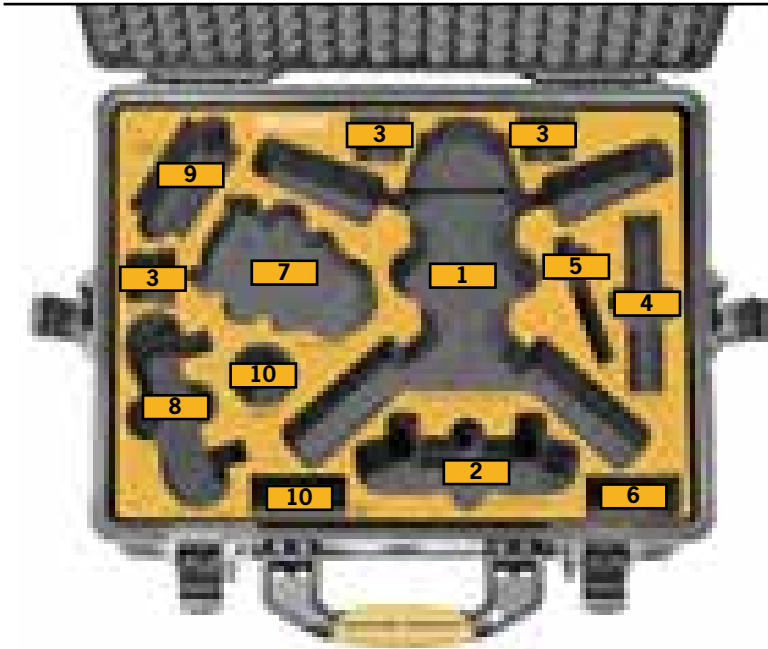


- 1 DJI Mavic 3 Pro Cine Premium Combo Flying Mode
- 2 DJI RC / Pro / DJI Smart Controller
- 3 Intelligent Flight Battery
- 4 Battery Charging Hub
- 5 ND Filters Set
- 6 Portable Charger
- 7 DJI Mini 4 Pro Fly More Combo
- 8 DJI RC2 / DJI RC-N2 Smart Controller
- 9 Mini 4 Pro Two-Way Charging Hub
- 10 Miscellaneous / Cables / Propellers



TECHNICAL FEATURES

Dimension: Internal dimension: 482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in) External dimension: 543,4x426,8x218,1(mm) - 21.39x16.80x8.59(in)	
Weight: empty: 4,25kg - 9.37lbs with cubed foam: 5,05kg - 11.13lbs	
Temperature rating: Minimum Maximum -40°C -40°F +80°C +176°F	

TECHNICAL DRAWING

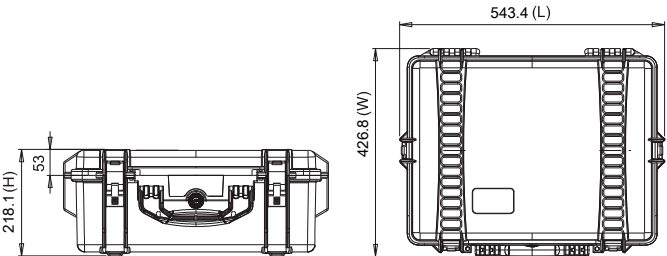

HPRC3500 for DJI Mavic 3 Pro Cine Premium Combo / Fly More Combo

S-MAV3P-3500-01



- 1 DJI Mavic 3 Pro with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC / Pro / DJI Smart Controller
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
Internal dimension:
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
External dimension:
497,9x370,3x185(mm) - 19.60x14.58x7.28(in)

Weight:
empty: 3kg - 6.61lbs
with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

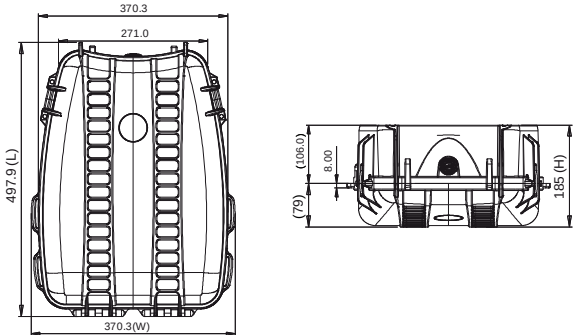

HPRC Soft bag for DJI Mavic 3 Pro Cine
Premium Combo / Fly More Combo

S-MAV3PBAG35

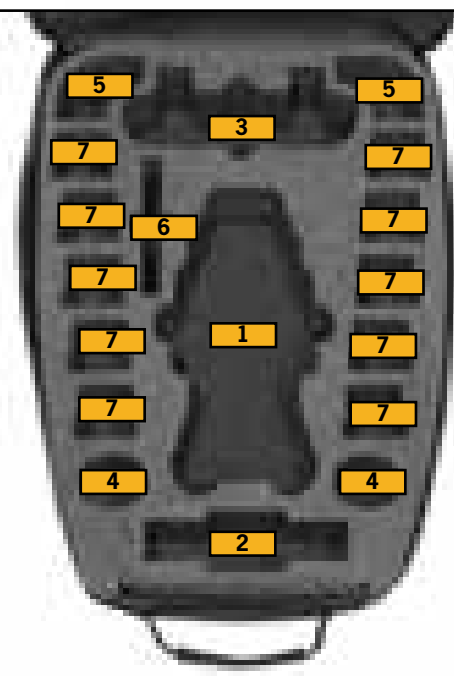

- 1 DJI Mavic 3 Pro with Storage Cover
- 2 Battery Charging Hub / Cables
- 3 DJI RC / Pro / DJI Smart Controller
- 4 Propellers / Portable Charger
- 5 Miscellaneous
- 6 ND Filters Set
- 7 Intelligent Flight Battery

TECHNICAL FEATURES

Dimension:
internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2400 for DJI Mavic 3 Cine / DJI Mavic 3 /
DJI Mavic 3 Classic

MAV3-2400-01



- 1
- DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic

2

3

4

5

6

7



HPRC MAVIC 3 CINE / DJI MAVIC 3 / DJI MAVIC 3 CLASSIC

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,23kg - 4.92lbs
with cubed foam: 2,58kg - 5.69lbs

Temperature rating:
Minimum Maximum
-40°C - 40°F +80°C +176°F



TECHNICAL DRAWING

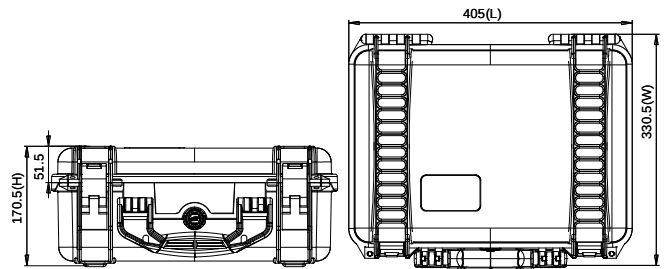

HPRC3500 for DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic

MAV3-3500-01



- 1 DJI Mavic 3 Cine / DJI Mavic 3 / DJI Mavic 3 Classic
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery



TECHNICAL FEATURES


Dimension:
 Internal dimension
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 External dimension
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
 empty: 3,00kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

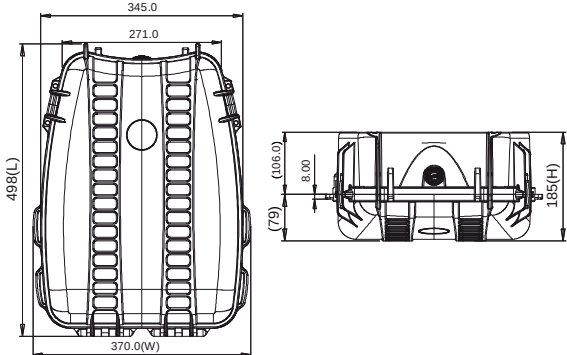

HPRC Soft Bag for DJI Mavic 3 Cine /
DJI Mavic 3

MAVBAG35-05

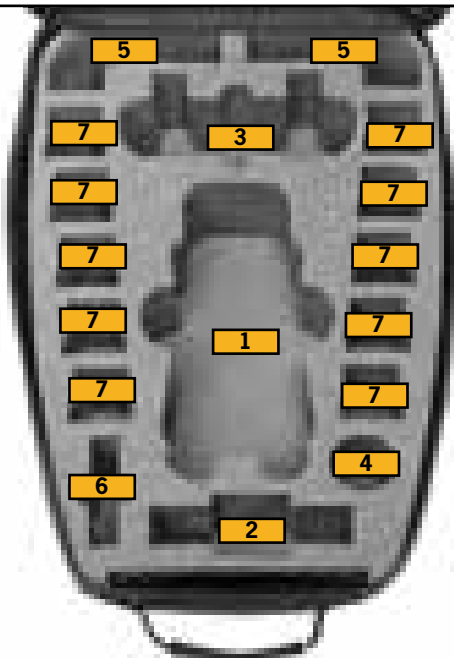

- 1 DJI Mavic 3 Cine / DJI Mavic 3
- 2 Battery Charging Hub / Cables
- 3 DJI RC Pro / DJI RC-N1 / DJI Smart Controllers
- 4 Propellers
- 5 Miscellaneous
- 6 ND Filters Set 2X
- 7 Intelligent Flight Battery





TECHNICAL FEATURES

Dimension:
internal dimension
433x319x169(mm) - 17.05x12.56x6.65(in)
external dimension
498x370x185(mm) - 19.61x14.57x7.28(in)



HPRC2800W for DJI Matrice 350 RTK (Zenmuse L2 & Zenmuse H30/H30T version) S-M350-2800W-03

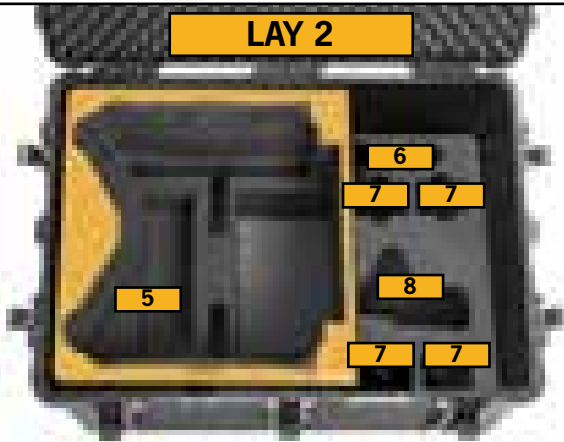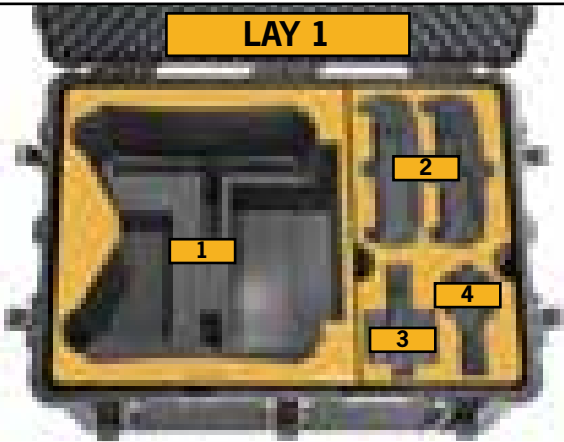

- 1 DJI Matrice 300 or 350 RTK in Landing Mode (2 Gimbal and 2 Batteries mounted)
- 2 2X DJI RC Plus
- 3 Zenmuse L2
- 4 Zenmuse P1

- 5 Propellers
- 6 WB37 Intelligent Battery
- 7 TB60 or TB65 Intelligent Flight Battery
- 8 Zenmuse H30/H30T



TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:


empty: 13,25kg - 29.22lbs
with cubed foam: 17,43kg - 38.43lbs

Temperature rating:





Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

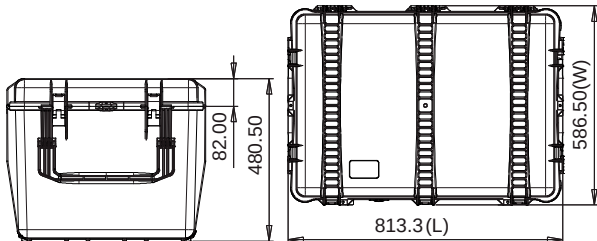

HPRC2800W for DJI Matrice 300 RTK
(Zenmuse H30/H30T version)
S-M300-2800W-04

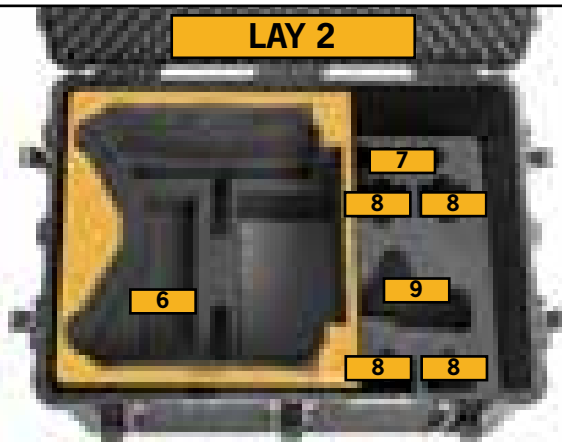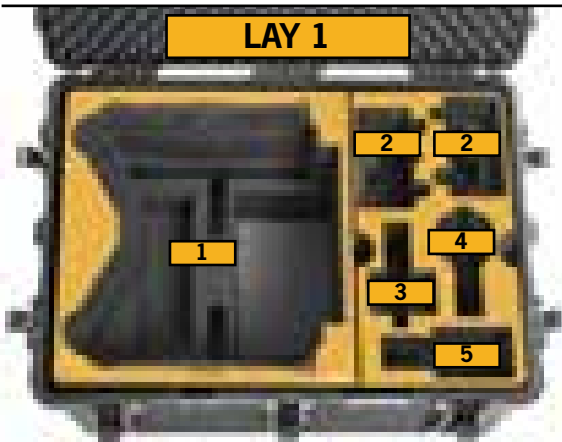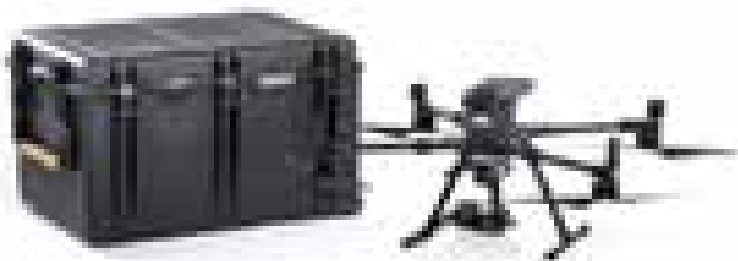

- 1

DJI Matrice 300 RTK in Landing Mode
(2 Gimbal and 2 Batteries mounted)
- 2

DJI Smart Controller Enterprise (Battery Attached)
- 3

Zenmuse L1
- 4

Zenmuse P1
- 5

H20/H20T Gimbal


- 6

Propellers
- 7

WB37 Intelligent Battery
- 8

TB60 Intelligent Flight Battery
- 9

Zenmuse H30/H30T

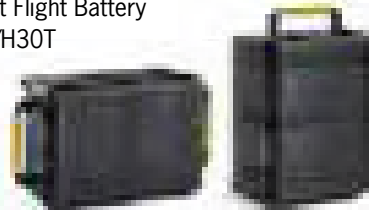

HPRC DJI MATRICE 300 RTK

TECHNICAL FEATURES

Dimension:

Internal dimension
748,6x524,6x454,6(mm) - 29.47x20.65x17.9(in)
External dimension
813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:


empty: 13,25kg - 29.22lbs
with cubed foam: 17,43kg - 38.43lbs

Temperature rating:

Minimum
-40°C -40°F
Maximum
+80°C +176°F





TECHNICAL DRAWING

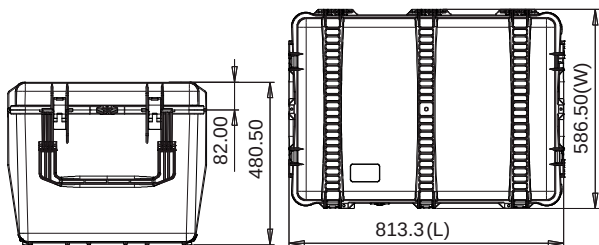

HPRC2550W for Battery DJI Matrice 300/350

BAT2550W-04

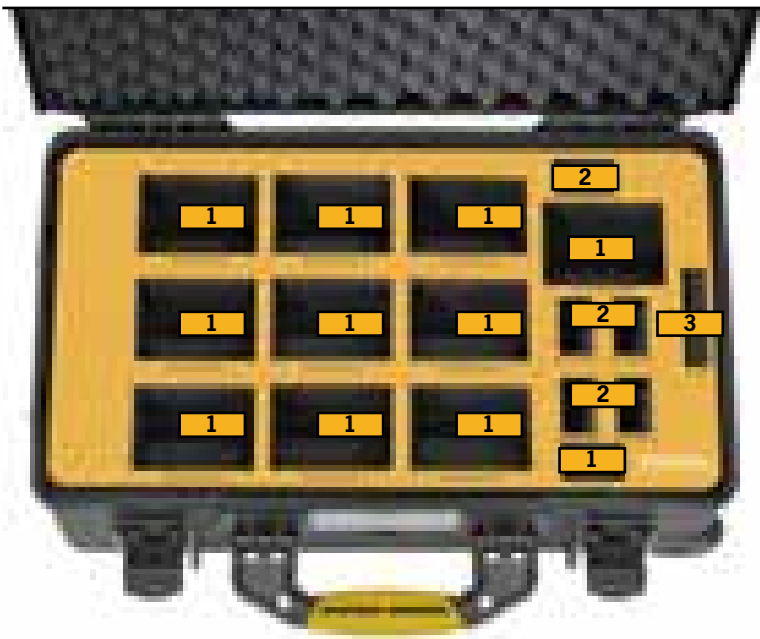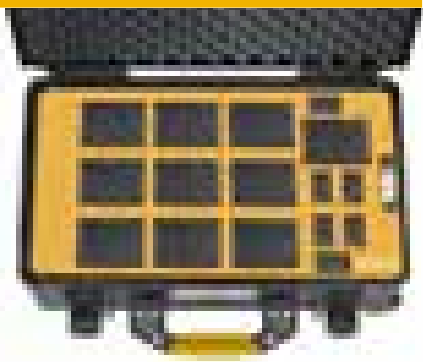

- 1 TB60/TB65 Intelligent Flight Battery
- 2 WB37 Intelligent Battery
- 3 Various/Perfect for Dry Keeper



TECHNICAL FEATURES


Dimension:
internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
empty: 4.35kg - 9.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

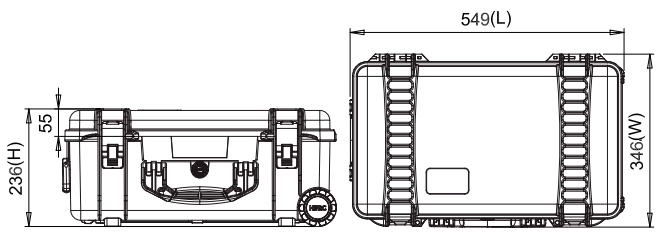

HPRC6500W for DJI D-RTK 2

DRTK6500W-01



- 1 D-RTK 2 Body
- 2 Accessories Box (Mobile Phone Holder; Charging Hub, Intelligent Battery, Battery Cover, Ac Power Adapter\Cable etc)
- 3 Extension Rod
- 4 Tripod

HPRC DJI D-RTK 2

TECHNICAL FEATURES


Dimension:
Internal dimension
1280,7x279x242,8(mm) - 50.42x10.98x9.56(in)
External dimension
1328x335x299,8(mm) - 52.28x13.19x11.8(in)

Weight:
empty: 7,2kg - 15.88lbs
with cubed foam: 9,03kg - 19.90lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F





TECHNICAL DRAWING

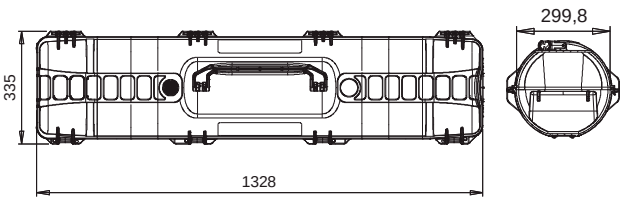

HPRC2710 for DJI Matrice 3D/3TD

S-M3TD-2710-01

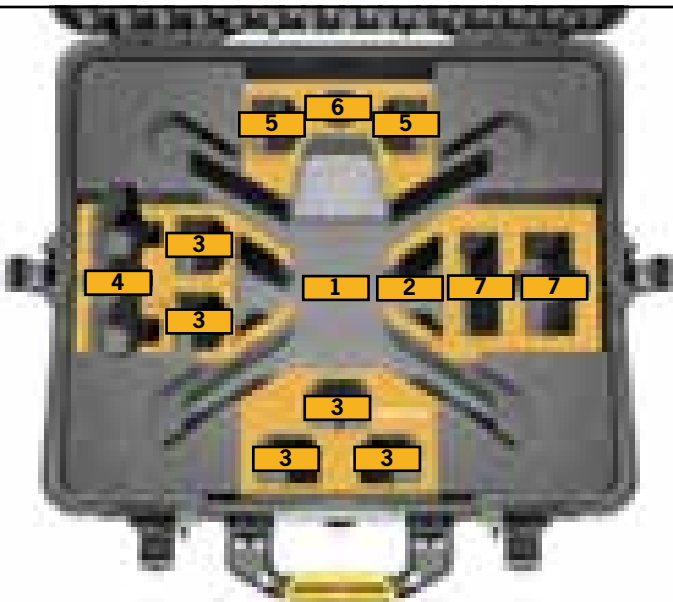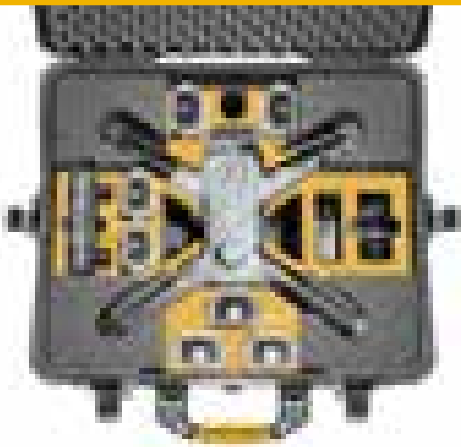

- 1 DJI Matrice 3D/3TD
- 2 Miscellaneous/Cables
- 3 Batteries
- 4 DJI RC Pro/DJI RC-N1/DJI Smart Controllers
- 5 Miscellaneous/Cables/Batteries
- 6 Propellers
- 7 Charging Kit



TECHNICAL FEATURES

Dimension:

Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)

External dimension:
617x525x280(mm) - 24.29x20.67x11.02(in)


Weight:

empty: 6,56kg - 14.46lbs
with cubed foam: 7,96kg - 17.55lbs

Temperature rating:



Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

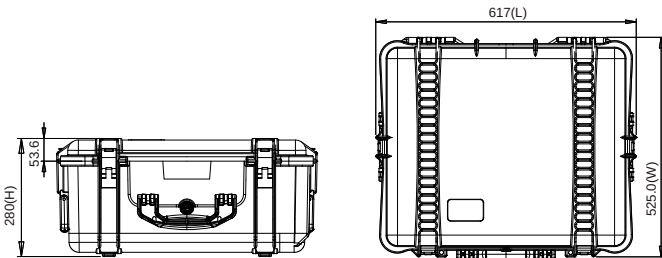

HPRC5200R for DJI Matrice 30T

M30T-5200R-01

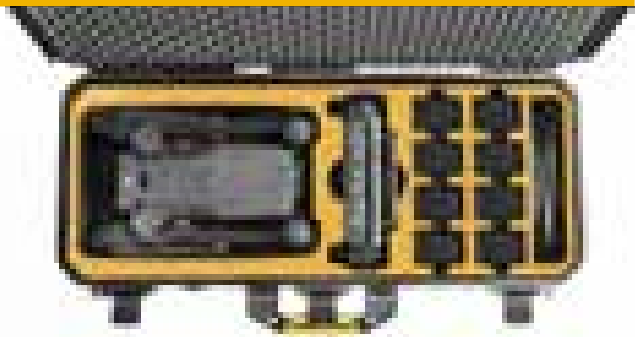

TECHNICAL FEATURES

Dimension:

Dimension:
Internal dimension
772x302x210(mm) - 30.39x11.89x8.26 (in)
External dimension
802x355x246.7(mm) - 31.57x13.97x9.71 (in)


Weight:

empty: 5.05kg – 11.1lbs

Temperature rating:

Minimum	Maximum
-40°C -40°F	+80°C +176°F

TECHNICAL DRAWING

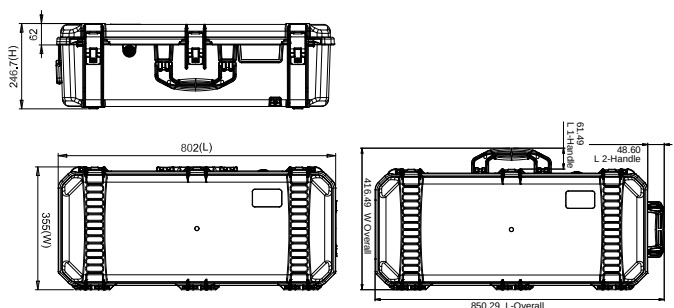

HPRC2760W for DJI Matrice 30T

M30T-2760W-01



- 1 WB37 Battery
- 2 TB30 Battery
- 3 DJI RC Plus Remote Controller
- 4 Aircraft Body
- 5 Loudspeaker
- 6 Miscellaneous



TECHNICAL FEATURES


Dimension:
Internal dimension
690x450x301(mm) - 27.16x17.72x11.85(in)
External dimension
750x511x329(mm) - 29.53x20.12x12.95(in)

Weight:
empty: 8,93kg - 19.69lbs
with cubed foam: 10,72kg - 23.63lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

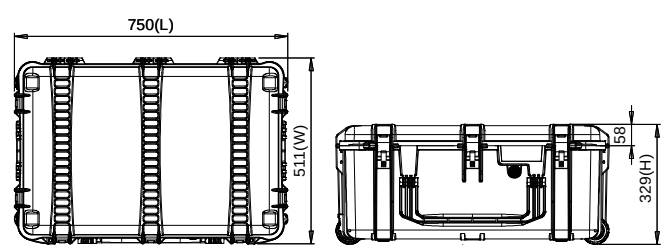

HPRC2700W for DJI Matrice 30T

M30T-2700W-01



- 1 Aircraft Body
- 2 Various/Miscellaneous
- 3 DJI RC Plus Remote Controller
- 4 Various/Miscellaneous
- 5 TB30 Battery



TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

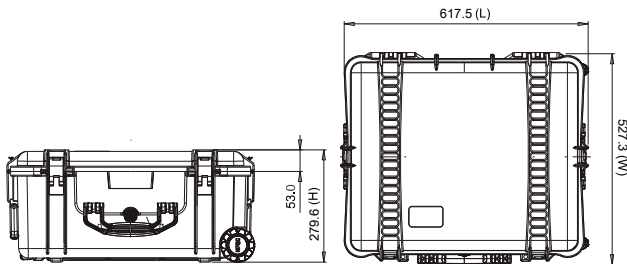

HPRC2460 for Batteries TB30 and DJI RC Plus

BAT2460-01



- 1 DJI RC Plus Remote Controller
- 2 WB37 Battery
- 3 TB30 Battery



TECHNICAL FEATURES


Dimension:
Internal dimension
409x306x175(mm) - 16.10x12.05x6.89(in)
External dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
empty: 2,55kg - 5.62lbs
with foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F





TECHNICAL DRAWING

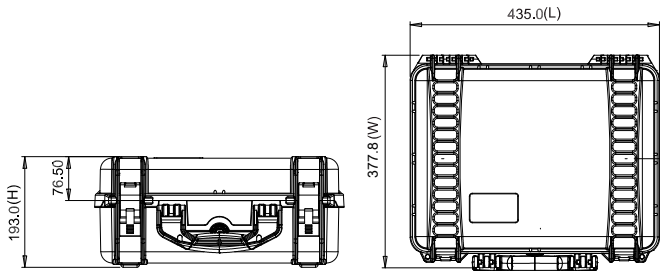

HPRC2500 for DJI RC Plus Controllers and WB37 Batteries

S-RCP-2500-01

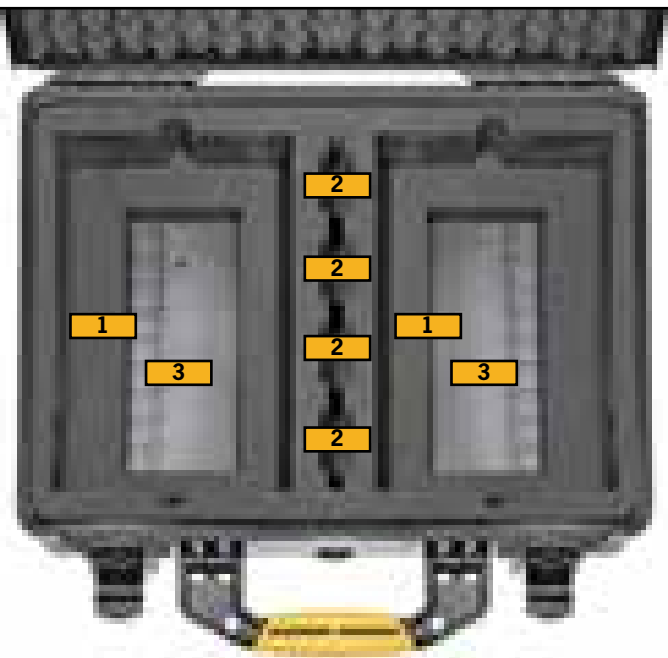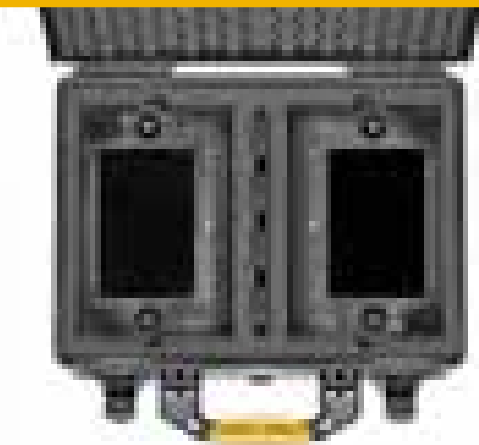

- 1 DJI RC Plus Controllers
- 2 WB37 Batteries
- 3 Miscellaneous

TECHNICAL FEATURES


Dimension:
Internal dimension:
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
External dimension:
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs



Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

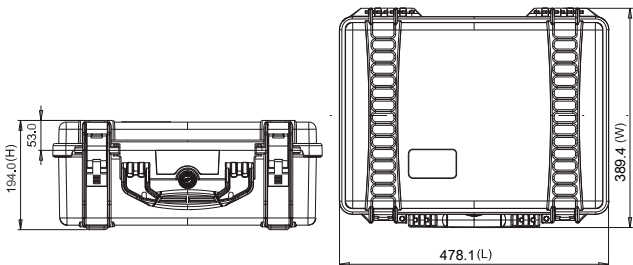

HPRC2800W for DJI Inspire 3 S-INS3-2800W-01

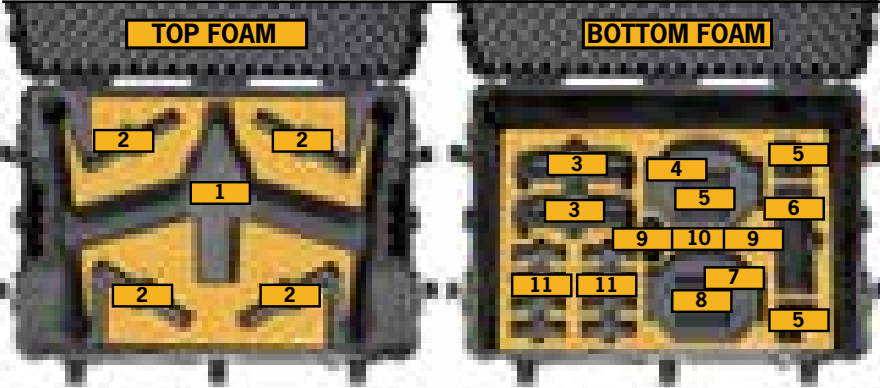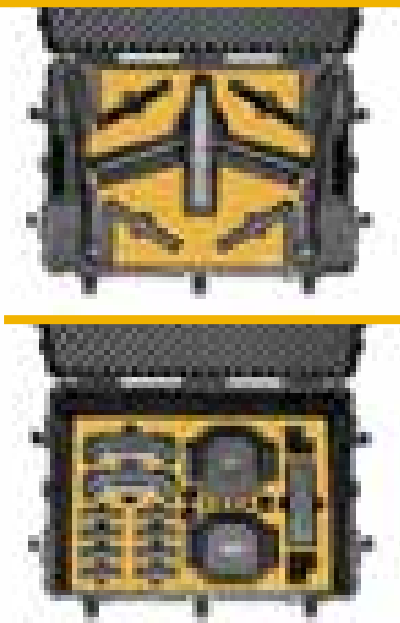

- 1 Inspire 3 Aircraft
- 2 Foldable Quick-Release Propellers (Pair)/ Miscellaneous
- 3 RC Plus
- 4 Zenmuse X9-8K Air Gimbal Camera Case
- 5 Various / Miscellaneous
- 6 TB51 Intelligent Battery Charging Hub
- 7 Lens Carrying Box (18/24/35/50mm)
- 8 RC Plus Strap
- 9 Cable
- 10 PROSSD 1TB
- 11 TB51 Intelligent Battery



TECHNICAL FEATURES


Dimension:
 Internal dimension:
 748,6x524,6x454,6(mm) - 29.47x20.65x17.90(in)
 External dimension:
 813,3x586,5x480,5(mm) - 32.02x23.09x18.92(in)

Weight:
 empty: 13,25kg - 29.22lbs
 with cubed foam: 17,43kg - 38.43lbs


Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

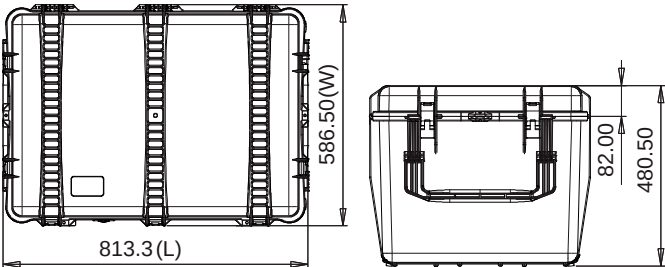

HPRC2550W for Inspire 3 batteries S-BAT2550W-O5

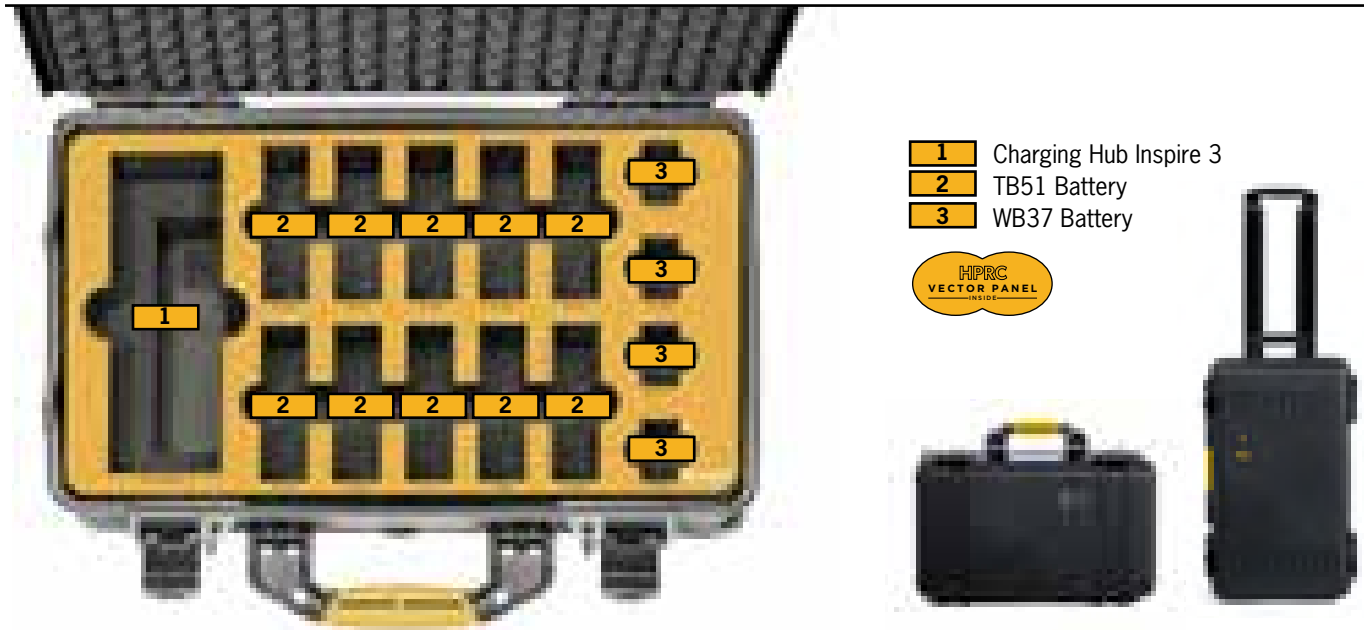

TECHNICAL FEATURES


Dimension:
 internal dimension
 513x288x200(mm) - 20.19x11.34x7.87(in)
 external dimension
 549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
 empty: 4,35kg - 9.57lbs
 with cubed foam: 5,04kg - 11.10lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

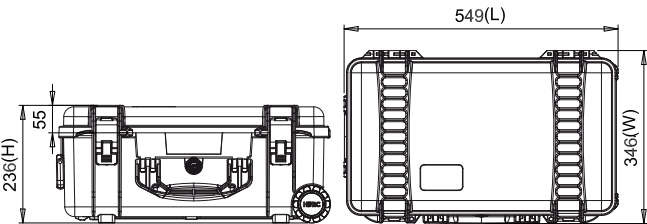

HPRC2300 for DJI Mini 4 Pro Fly More Combo with Smart Controller

S-MAVM-2300-04

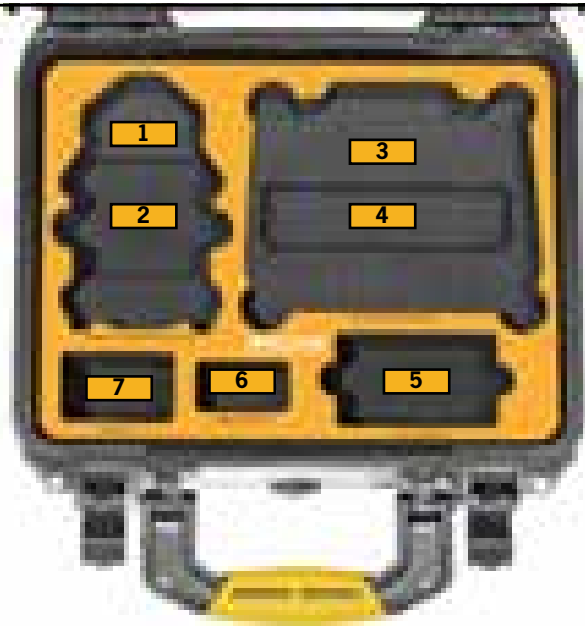

- 1 DJI Mini 4 Pro Fly More Combo
- 2 Spare Propellers/Cables
- 3 Flight Batteries
- 4 Smart Controller
- 5 Two-Way Charging Hub
- 6 Intelligent Flight Battery
- 7 Miscellaneous



HPRC DJI MINI 4 PRO

TECHNICAL FEATURES


Dimension:
Internal dimension:
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension:
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

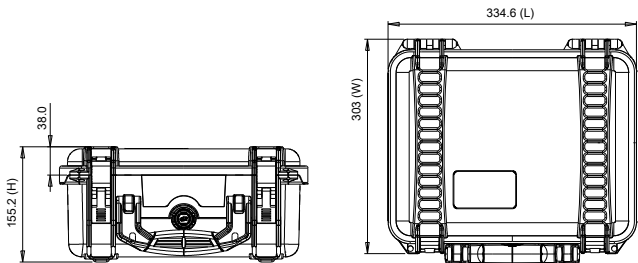

HPRC2300 for Dji Neo Fly More Combo

S-NEO-2300-01

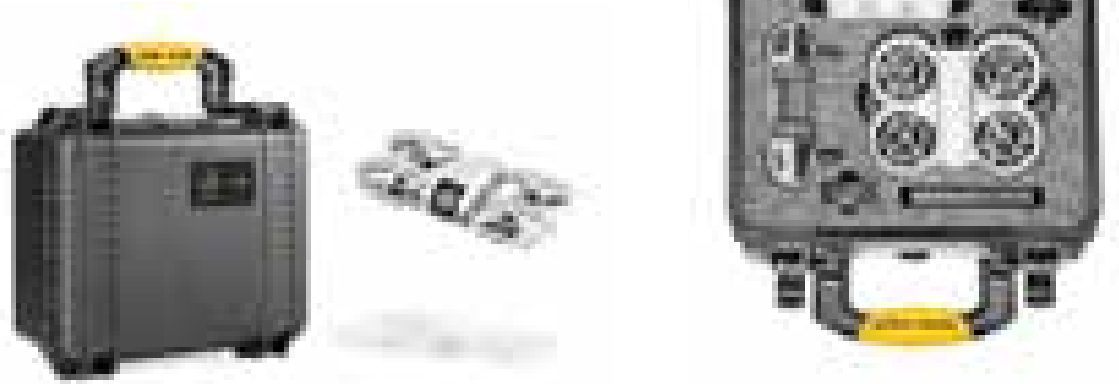

- 1 DJI Neo
- 2 Two-Way Charging Hub with Intelligent Flight Battery
- 3 DJI RC-N3 Remote Controller
- 4 Cables & Propellers

Foam in Arplank 30: 100% recyclable and manufactured with 25% recycled content

HPRC DJI NEO FLY MORE COMBO

TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

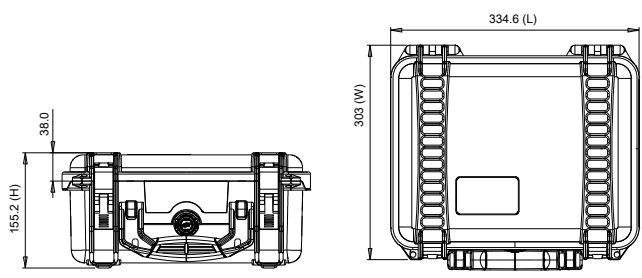




HPRC2400 for DJI Air 3 & Air 3S Fly More Combo

S-MAV3A-2400-02



- 1 DJI Air 3 & Air 3S with Gimbal Protector
- 2 ND Filters Set
- 3 Miscellaneous
- 4 Battery Charging Hub
- 5 DJI RC 2 / DJI RC-N2 or DJI RC-N3
- 6 Intelligent Flight Battery
- 7 Cables

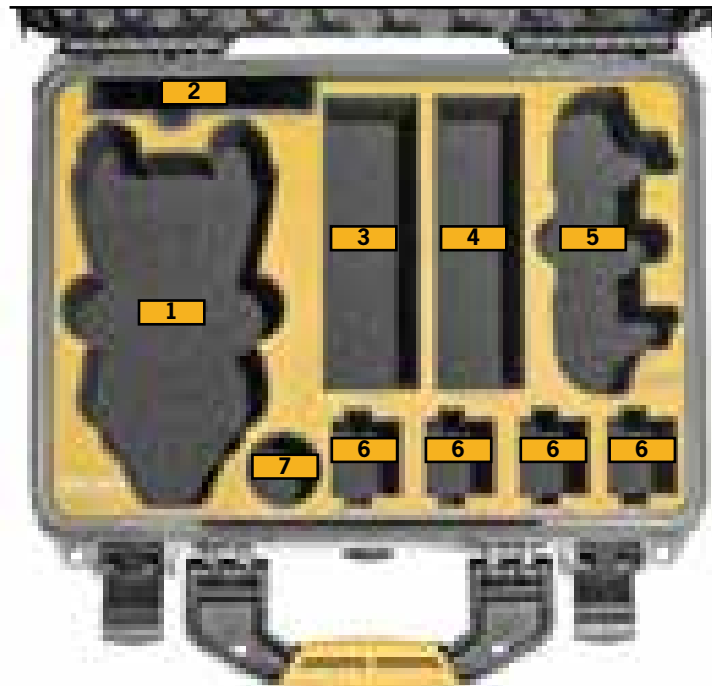

TECHNICAL FEATURES

Dimension:

Internal dimension:
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension:
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:


empty: 2,17kg - 4.78lbs
with cubed foam: 2,58kg - 5.69lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

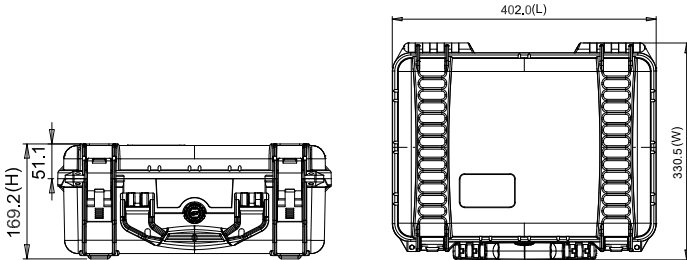

HPRC3500 DJI Air 3 & Air 3S Fly More Combo

S-MAV3A-3500-01

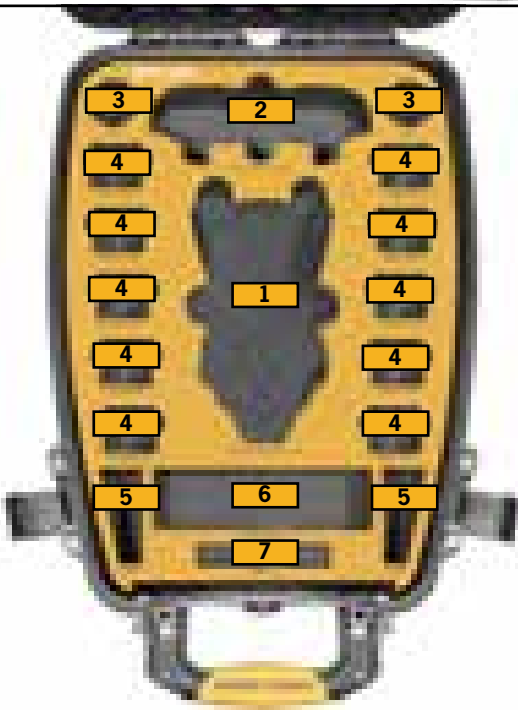

- 1 DJI Air 3 & Air 3S with Gimbal Protector
- 2 DJI RC 2 / DJI RC-N2 or DJI RC-N3
- 3 Cables
- 4 Intelligent Flight Battery
- 5 Propellers
- 6 Battery Charging Hub
- 7 ND Filters Set



TECHNICAL FEATURES


Dimension:
Internal dimension:
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
External dimension:
497,9x370,3x185(mm) - 19.60x14.58x7.28(in)

Weight:
empty: 3kg - 6.61lbs
with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

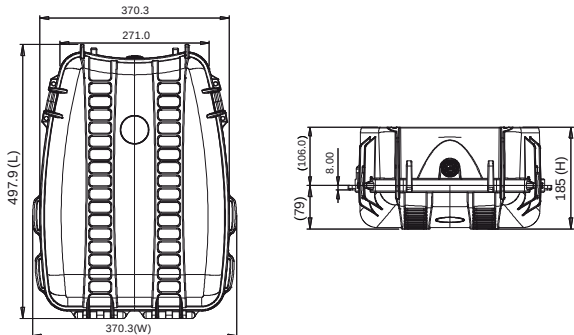

HPRC2500 for DJI Avata 2 Fly More Combo

S-AVAT2-2500-01

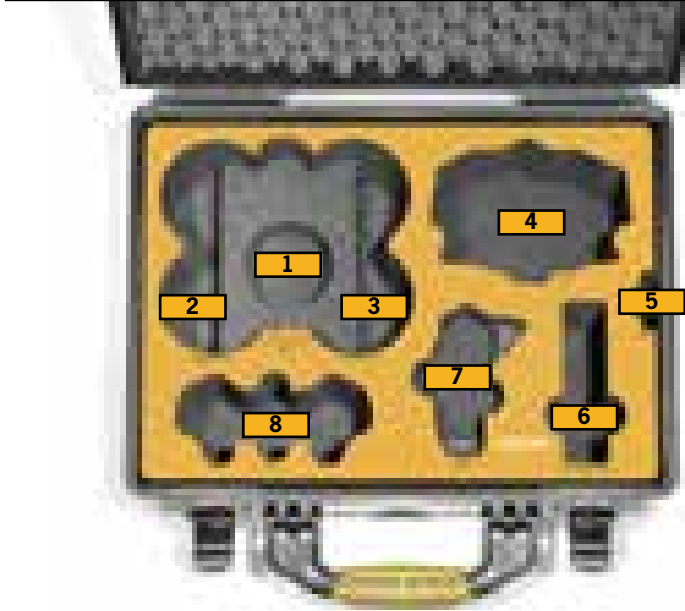

- 1 DJI Avata 2 Fly More Combo
- 2 Miscellaneous/ Cables
- 3 Propellers
- 4 Goggles 3
- 5 ND Filters
- 6 Two-Way Charging Hub with Batteries
- 7 RC Motion 3
- 8 Controller



TECHNICAL FEATURES


Dimension:
Internal dimension:
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
External dimension:
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

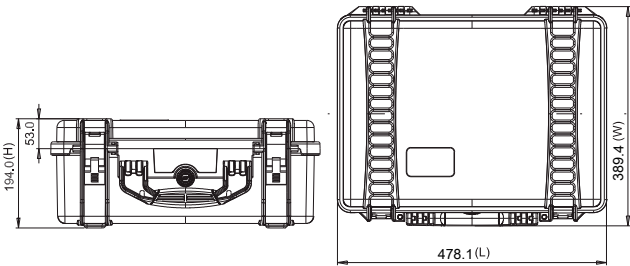

HPRC DJI AVATA 2 FLY MORE COMBO

HPRC3500 for DJI Avata 2 Fly More Combo

S-AVAT2-3500-01

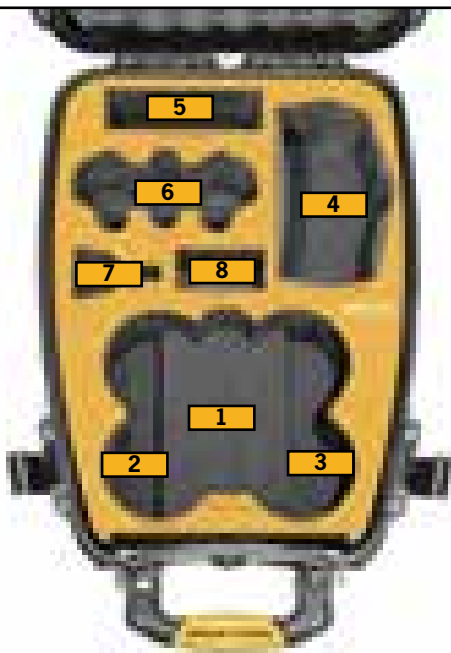

- 1 DJI Avata 2 Fly More Combo
- 2 Miscellaneous/ Cables
- 3 ND Filters / Cables
- 4 Goggles 3
- 5 Two-Way Charging Hub with Batteries
- 6 Controller
- 7 RC Motion 3
- 8 Propellers



TECHNICAL FEATURES


Dimension:
Internal dimension:
433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
External dimension:
497,9x370,3x185(mm) - 19.6x14.58x7.28(in)

Weight:
empty: 3,00kg - 6.61lbs
with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

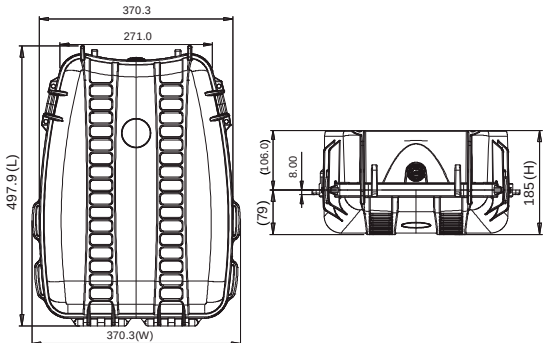

HPRC2500 for DJI Avata Pro - View Combo

AVAT-2500-01



- 1 DJI Avata
- 2 Battery Charging Hub
- 3 Cable/Miscellaneous
- 4 Intelligent Flight Battery
- 5 Goggles 2 Battery
- 6 Goggles 2
- 7 Cable/Miscellaneous
- 8 Controller
- 9 Power Adapter
- 10 Eyeglass Frames (Pair)
- 11 Motion Controller



TECHNICAL FEATURES


Dimension:
Internal dimension:
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
External dimension:
478,1x389,4x194,0(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

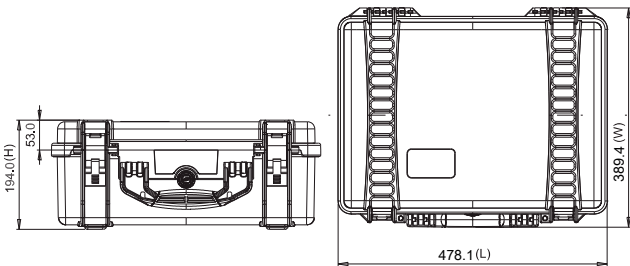

HPRC3500 for DJI Avata Pro - View Combo

AVAT-3500-01



- 1 DJI Avata
- 2 Cable/Miscellaneous
- 3 Battery Charging Hub
- 4 Goggles 2
- 5 Intelligent Flight Battery
- 6 Eyeglass Frames (Pair)
- 7 Controller
- 8 Cable/Miscellaneous
- 9 Power Adapter
- 10 Goggles 2 Battery
- 11 Motion Controller



HPRC DJI AVATA PRO

TECHNICAL FEATURES


Dimension:
 Internal dimension:
 433,5x319,3x168,8(mm) - 17.07x12.57x6.65(in)
 External dimension:
 497,9x370,3x184,9(mm) - 19.6x14.58x7.28(in)

Weight:
 empty: 3,00kg - 6.61lbs
 with cubed foam: 3,55kg - 7.82lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

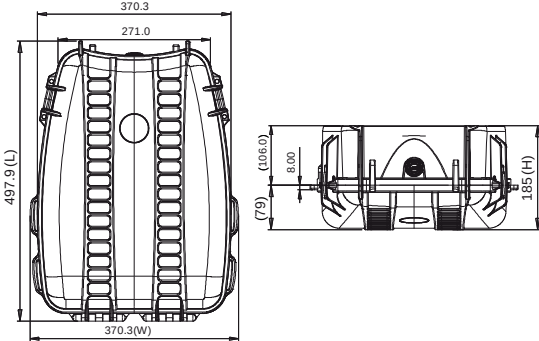

HPRC2500 for DJI FPV Combo

FPV-2500-01

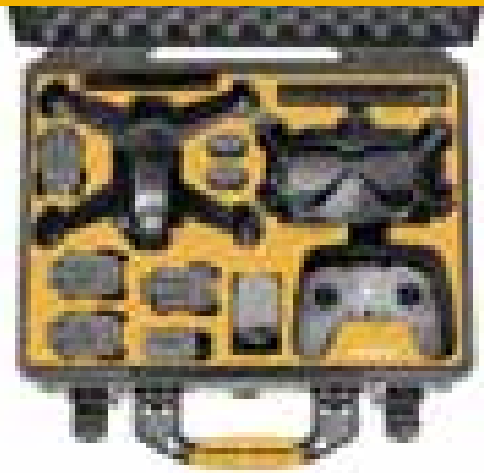

- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Fly More kit
- 4 Goggles V2 with Goggles Antenna (or TrueRC) mounted
- 5 Remote Controller
- 6 Motion Controller
- 7 AC Power Adaptor
- 8 Intelligent Flight Battery
- 9 Propellers (Pair)/Cable



TECHNICAL FEATURES


Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
empty: 3,22kg - 7.10lbs
with cubed foam: 3,69kg - 8.12lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

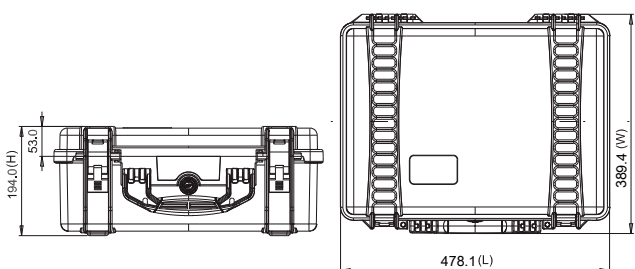

HPRC3600 for DJI FPV Combo

FPV-3600-01



- 1 DJI FPV Drone
- 2 Goggles Battery
- 3 Intelligent Flight Battery
- 4 AC Power Adaptor
- 5 Fly More kit
- 6 Propellers (Pair)/Cable
- 7 Miscellaneous/Motion Controller
- 8 Miscellaneous
- 9 Remote Controller
- 10 Goggles V2 with Goggles Antenna (or TrueRC) mounted



HPRC DJI FPV


TECHNICAL FEATURES

Dimension:
Internal dimension
479x354x194(mm) - 18.86x13.94x7.64(in)
External dimension
542x402x220(mm) - 21.34x15.83x8.66(in)

Weight:
empty: 3,23 kg - 7,11 lbs
with foam: 3,75 kg - 8,26 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

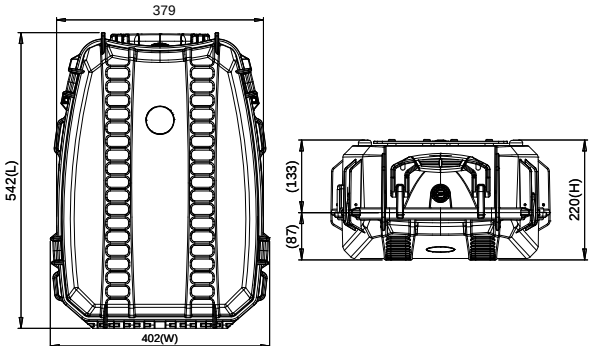

HPRC2700W for DJI Phantom 4RTK

PHA4RTK-2700W-01



- 1 DjI Phantom 4 RTK / Multispectral
- 2 Intelligent Flight Battery
- 3 Remote Controller
- 4 Ipad Air/Tablet Up to 10"
- 5 Hprc1100 For 8 Microsd Cards
- 6 Charging Hub for WB37
- 7 Battery WB37
- 8 Charging Hub for Int.flight Battery
- 9 AC Power Adapter / Miscellaneous Accessories
- 10 Propellers



suitable for v 2.0 low noise propellers

TECHNICAL FEATURES

Dimension:

Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:


empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F





TECHNICAL DRAWING

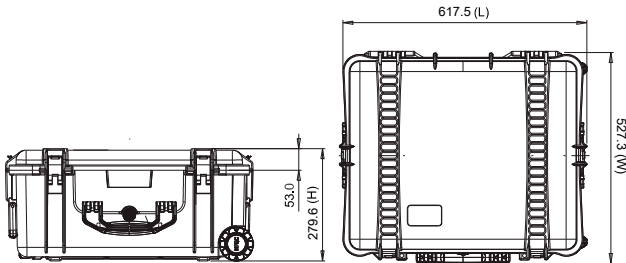

HPRC2730W for DJI Ronin 4D-6K Combo

R4D-2730W-01

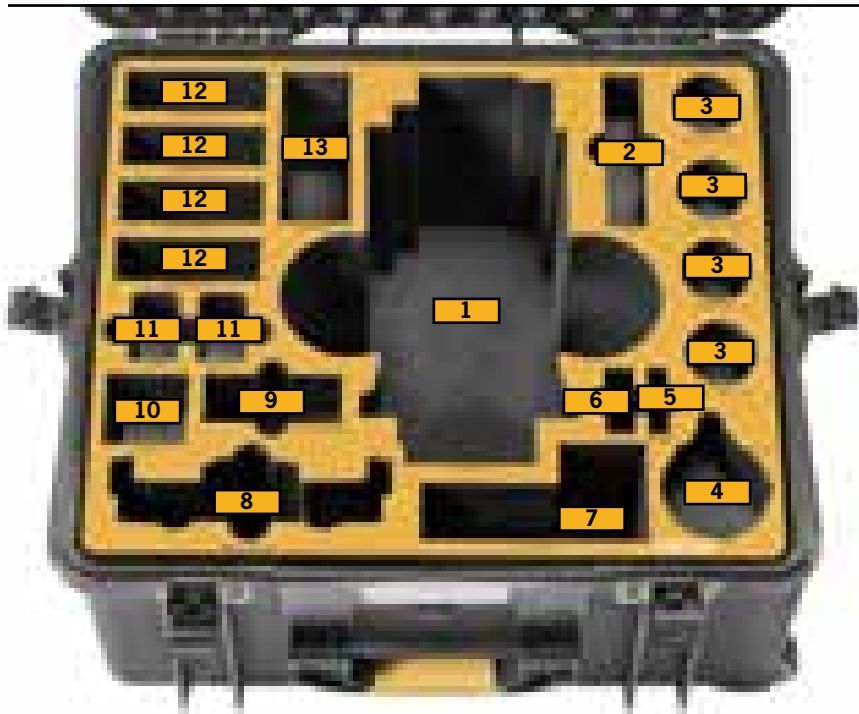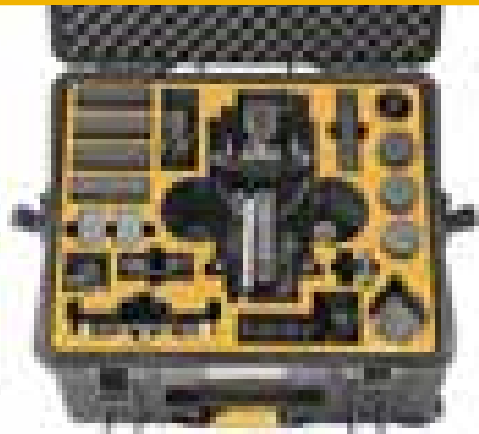

- 1 DJI Ronin 4D Mounted
- 2 Charger
- 3 Lens DL 24/35/50 mm F2.8 LS
- 4 DL Mount
- 5 MRW-G1.SYM (Sony)
- 6 DJI Prossd 1TB
- 7 Various/Miscellaneous
- 8 DJI High-Bright Remote Monitor
- 9 DJI Zenmuse X9 Counterweight
- 10 CF Express Type B
- 11 NP-F970 (Sony)
- 12 TB50 Intelligent Flight Battery
- 13 Various/Miscellaneous



TECHNICAL FEATURES


Dimension:
Internal dimension
503x459x316(mm) - 19.80x18.07x12.44(in)
External dimension
616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
empty: 8,41kg - 18.54lbs
with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F





TECHNICAL DRAWING

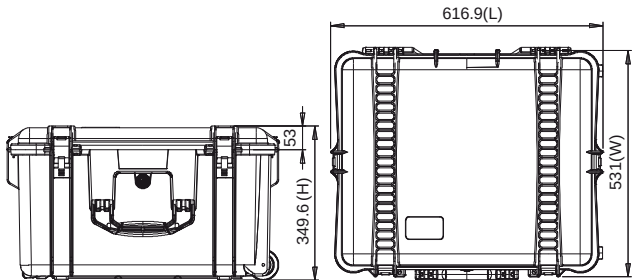


HPRC2600 for DJI RS 4 Pro Combo

S-RS4-2600-01

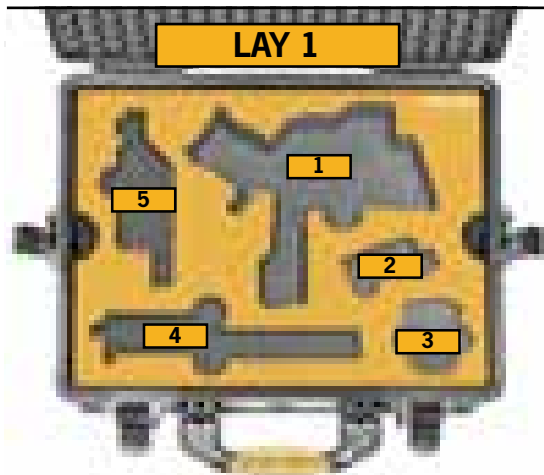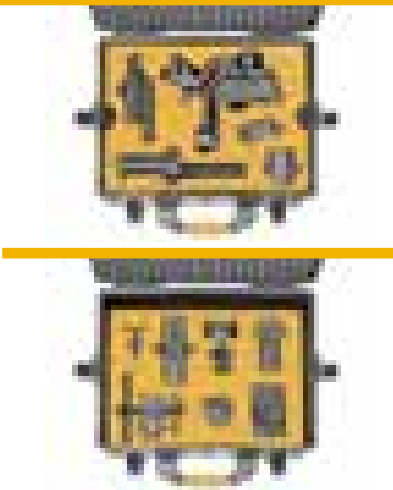

- 1 Gimbal
- 2 Focus Pro Motor
- 3 Ronin Image Transmitter
- 4 BG30 Grip with Extended Grip / Tripod
- 5 Briefcase Handle

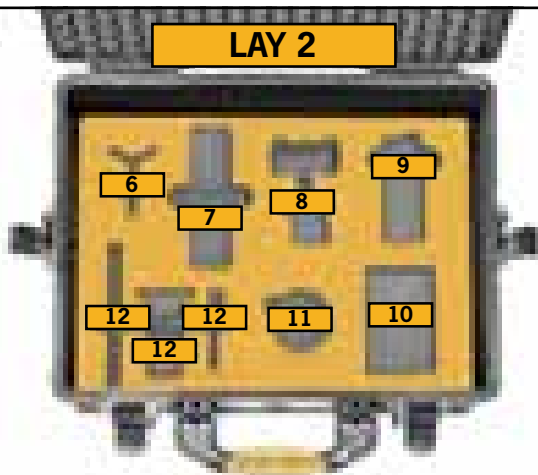

- 6 Lens-Fastening Support
- 7 Lower Quick-Release Plate
- 8 Phone Holder
- 9 Quick-Release Plate
- 10 Miscellaneous / Cables
- 11 Focus Gear Strip / Miscellaneous
- 12 Focus Pro Motor / Rod Mount Kit



HPRC DJI RS 4 PRO COMBO


TECHNICAL FEATURES

Dimension:
Internal dimension:
482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in)
External dimension:
543,4x426,8x218,1(mm) - 21.39x16.80x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

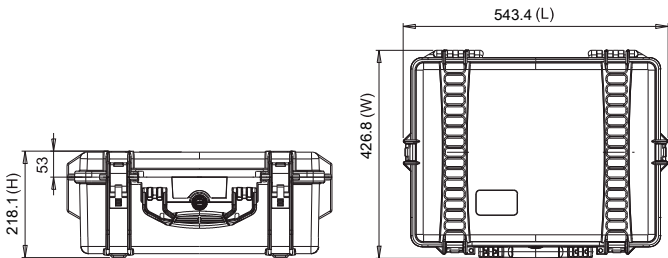

HPRC2600 for DJI RS 3 Pro Combo

RS3-2600-01

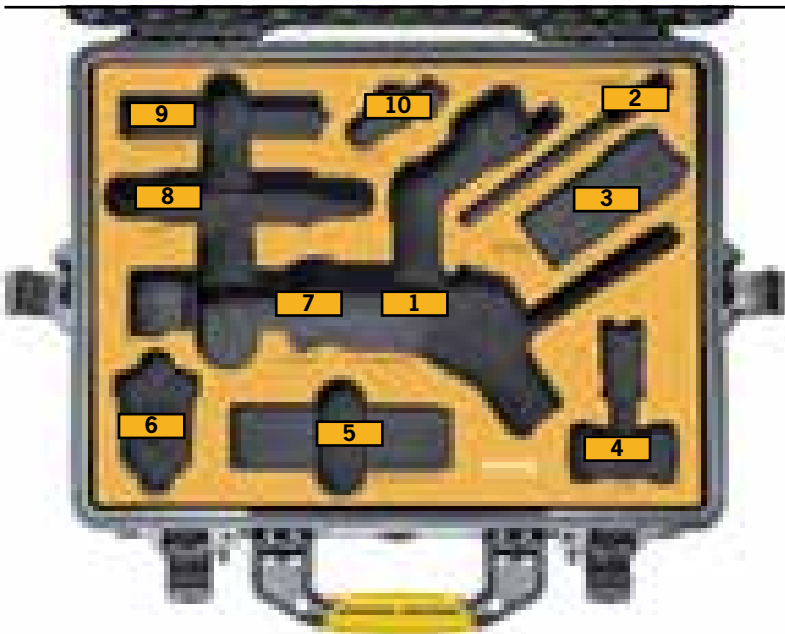

- 1 Gimbal with BG30 Grip mounted
- 2 Focus Motor Rod Mount Kit Combo
- 3 Quick-Release Plate (Arca-Swiss/Manfrotto)
- 4 Phone Holder
- 5 Lower Quick-Release Plate (Extended)
- 6 Ronin Image Transmitter
- 7 Cable/Miscellaneous
- 8 Briefcase Handle
- 9 Extended Grip/Tripod (Metal)
- 10 Focus Motor (2022)



HPRC DJI RS 3 PRO COMBO


TECHNICAL FEATURES

Dimension:
Internal dimension
482,4x358,3x198,1(mm) - 18.99x14.10x7.80(in)
External dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

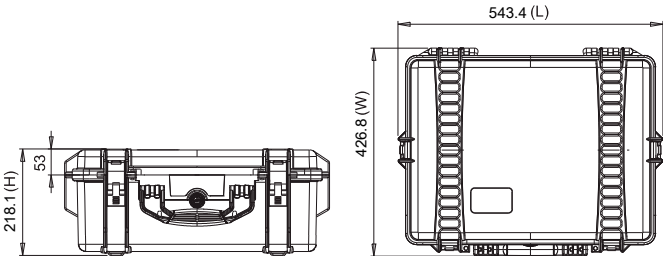

HPRC2300 for DJI RS 3 Mini Creator Combo

RS3M-2300-01

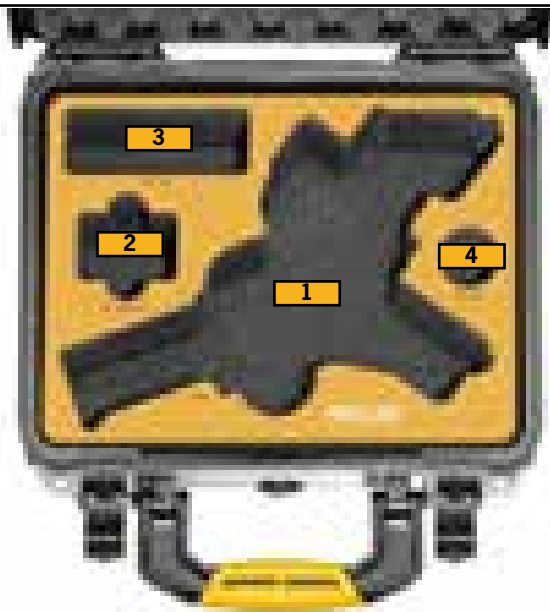

- 1 Gimbal
- 2 Mic Charging Case
- 3 Various/cable
- 4 Mini Tripod



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

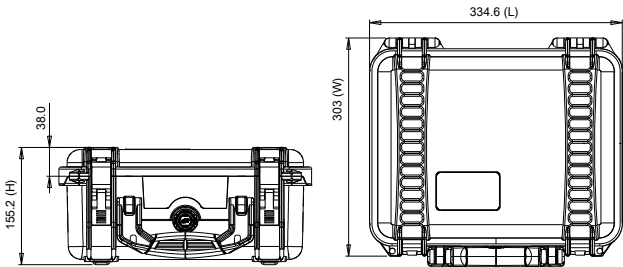

HPRC1400 for DJI Pocket 2 Creative Combo Kit OSMPKT-1400-02



- 1 DJI Pocket 2 with 1/4"-20 Tripod Mounted
- 2 Micro Tripod
- 3 Mini Control Stick
- 4 Cable/Wireless Microphone Windscreen
- 5 Do-it-All Handle
- 6 Wireless Microphone Transmitter/SD Card
- 7 Wide-Angle Lens
- 8 Lightning (iOS) Smartphone Adapter/ USB Type-C Smartphone Adapter



TECHNICAL FEATURES


Dimension:
 internal dimension
 180x110x40(mm) - 7.08x4.33x1.57(in)
 external dimension
 200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
 empty: 0,26kg - 0.57lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

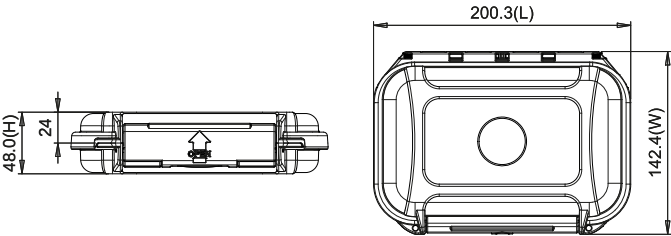

HPRC1400 for DJI Osmo Pocket 3 Creator Combo

S-OSMPKT-1400-03

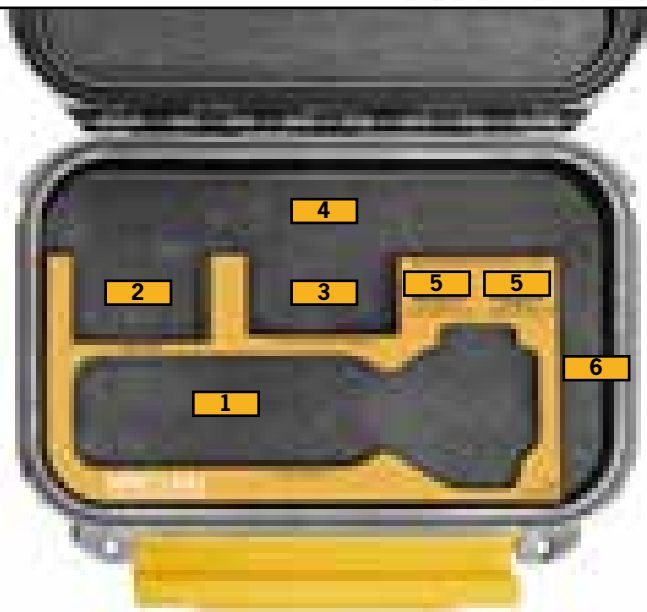

- 1 DJI Osmo Pocket 3
- 2 Battery Handle
- 3 Transmitter with attached Clip Magnet
- 4 Mini Tripod with attached Handle With 1/4" Thread
- 5 Wide-Angle Lens + Magnetic ND Filters Set
- 6 Cable + Windscreen



TECHNICAL FEATURES


Dimension:
Internal dimension:
180x110x40(mm) - 7.08x4.33x1.57(in)
External dimension:
200,3x142,4x48(mm) - 7.89x5.61x1.89(in)

Weight:
empty: 0,26kg - 0.57lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

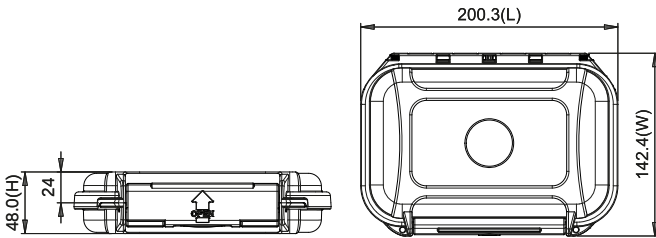



AUTEL ROBOTICS

HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for Autel Robotics Evo Lite+ Premium Bundle LITE-2460-01



- 1 Aircraft (including battery, propellers and gimbal cover)
- 2 Multi-Charger
- 3 Spare Propellers
- 4 Power Adapter
- 5 Cable
- 6 Spare Battery
- 7 Remote Control
- 8 Filter Set
- 9 Usb Cable



TECHNICAL FEATURES

Dimension:

Internal dimension
 409x306x175(mm) - 16.10x12.05x6.89(in)
 External dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:


empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

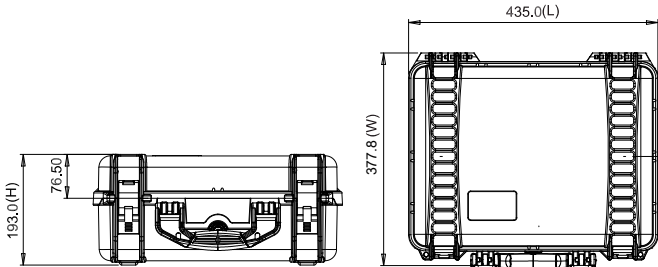

HPRC2300 for Autel Robotics Evo Nano+ Premium Bundle

NANO-2300-01



- 1 Autel Evo Nano+ including battery, propellers, gimbal cover and propeller holder
- 2 Spare Propellers
- 3 Spare Battery
- 4 Remote Control
- 5 Cables/Miscellaneous
- 6 Power Adapter
- 7 Multi-Charger



HPRC AUTEL ROBOTICS EVO NANO+

TECHNICAL FEATURES

Dimension:

Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41 (in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:


empty: 1,70kg - 3.75lbs
with foam: 1,9kg - 4.19lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

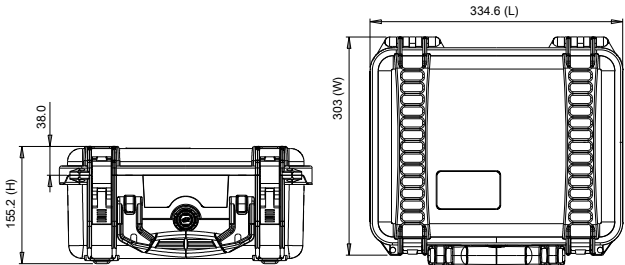

HPRC2400 Autel Robotics Evo II

6K / 8K Drone

EVO2-2400-02



- 1 Autel Robotics Evo II 6K / 8K with propellers - low noise
- 2 Remote Controller
- 3 Battery Charging Hub
- 4 Flight Battery
- 5 Cable/Propellers/Accessories
- 6 Micro USB Cable
- 7 Charger



TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

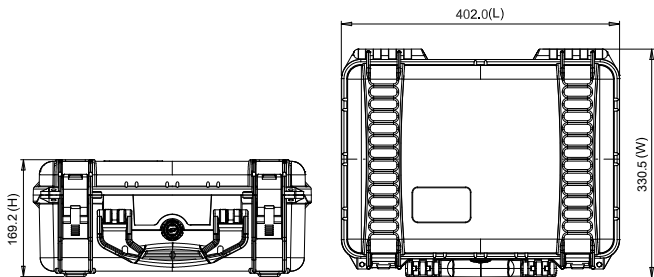



ATOMOS

HPNC READY MADE SOLUTIONS – 2025

HPRC2300 for Atomos Ninja Ultra, Ninja or Ninja V

NJAV-2300-01



- 1 Atomos Ninja Ultra, Ninja or Ninja V with AtomX SSD mini and battery assembled on drone
- 2 Ninja Sunhood
- 3 Battery
- 4 12V-3A AC Power Supply
- 5 Cables/Miscellaneous
- 6 3 Master Caddy II
- 7 Docking Station
- 8 Battery Eliminator
- 9 Fast Charger



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

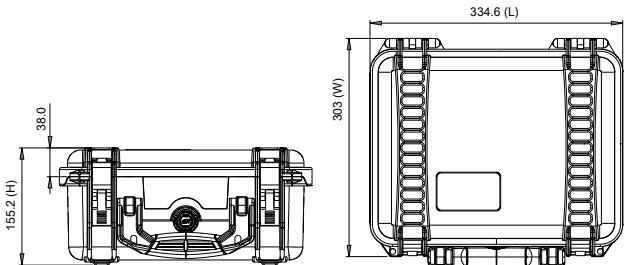

HPRC2400 for Atomos Shogun, Shogun Ultra and Shogun Connect

S-SHGC-2400-01

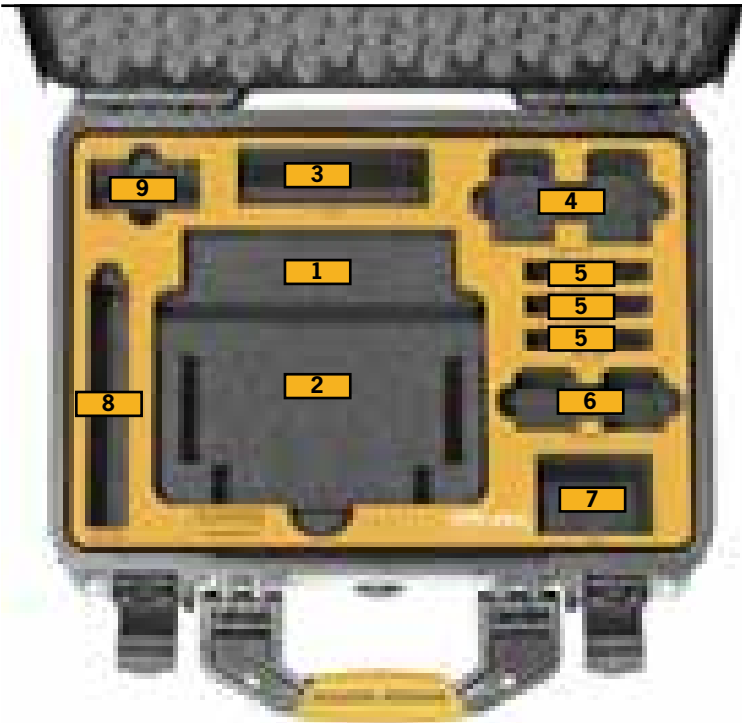

- 1 Atomos Shogun, Shogun/Ultra/Connect with Antennas Mounted
- 2 Adaptor/Miscellaneous
- 3 Various
- 4 Battery NP-F960
- 5 Master Caddy
- 6 Battery NP-F750
- 7 Charger
- 8 Docking Station
- 9 Charger



TECHNICAL FEATURES


Dimension:
Internal dimension:
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension:
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,17kg - 4.78lbs
with cubed foam: 2,58kg - 5.69lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

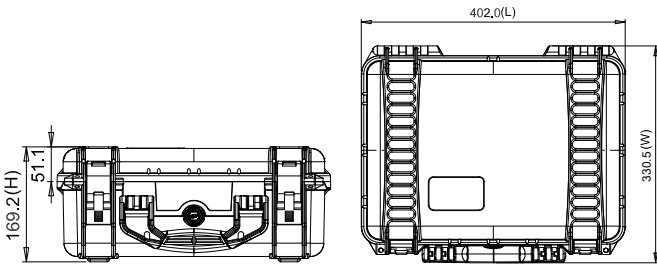

HPRC2730W for Atomos Sumo19"/ Sumo19" SE SM19-2730W-01

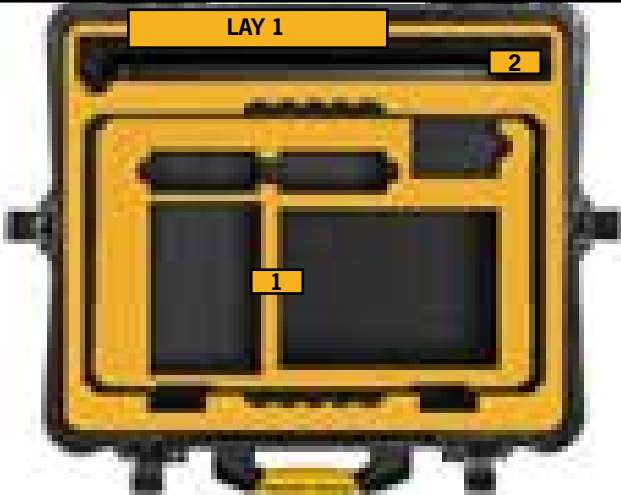

- 1** Atomos Sumo 19"/ Sumo19" SE Monitor Recorder
- 2** Atomos Sunhood



- 3** Charger
- 4** 3 Master caddy II
- 5** DM-130A Gold Mount Mini Battery or similar
- 6** D-4BA Battery Extender or similar

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING


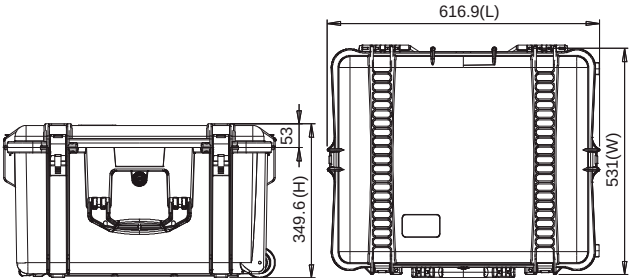




BLACKMAGIC

HPRC READY MADE SOLUTIONS – 2025

HPRC2400 for Blackmagic Pocket Cinema Camera 6K Pro or Blackmagic Cinema Camera 6K PKT6P-2400-01

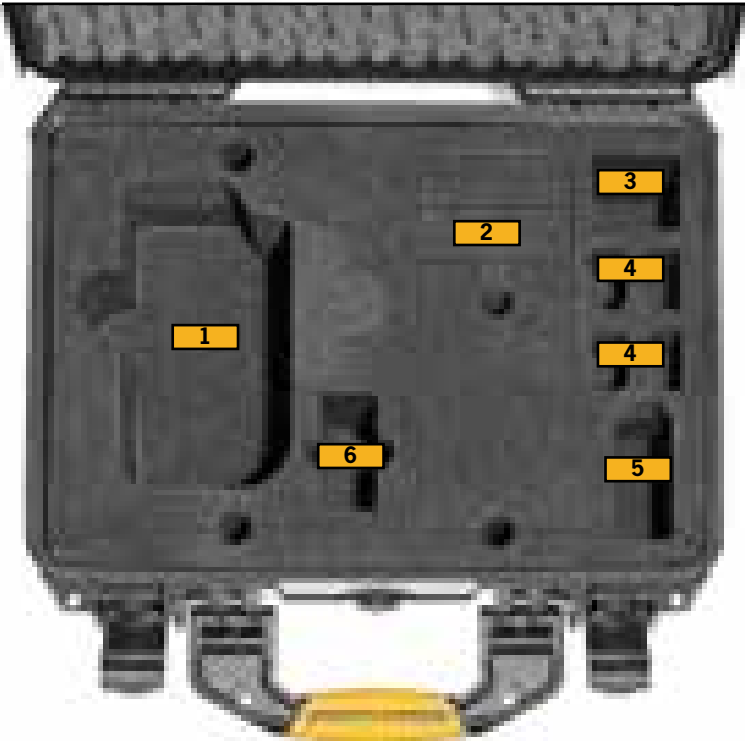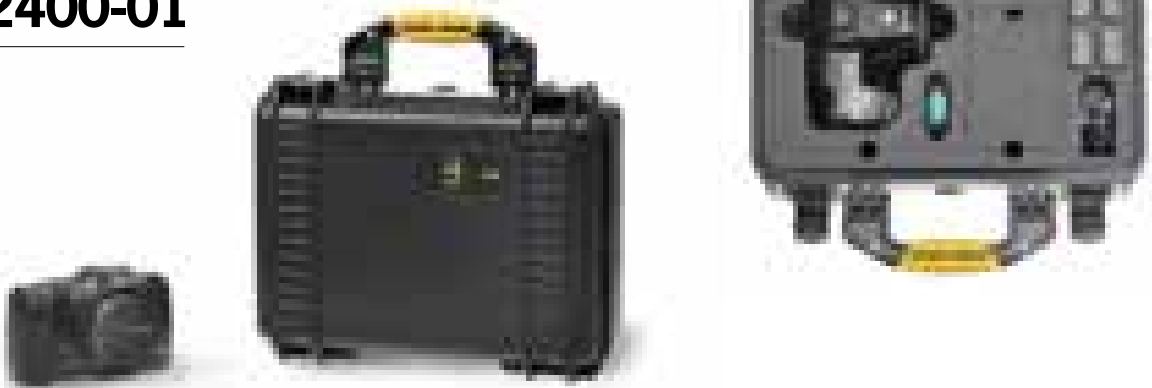

- 1 Blackmagic Pocket Cinema Camera 6K Pro / Cinema Camera 6K with or without professional cage
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 NP-F570 Battery
- 5 30W power supply
- 6 HPRC1100MEM

TECHNICAL FEATURES


Dimension:
Internal dimension:
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension:
402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,17kg - 4.78lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

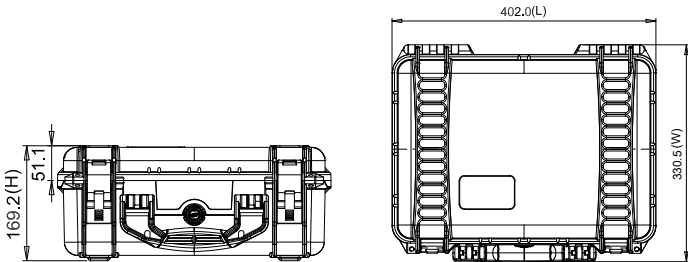

HPRC BLACKMAGIC POCKET CINEMA CAMERA 6K PRO / CINEMA CAMERA 6K

HPRC2400 Combo for Blackmagic Pocket Cinema Camera 6K or 4K

PKTC-2400-01



- 1 Cinema Blackmagic Pocket 4K or 6K with or without professional cage and Metabones mounted
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 International Adapters
- 4 LP-E6 Battery
- 5 30W power supply
- 6 HPRC1100MEM

TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402x330,5x169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,23kg - 4.91lbs
 with cubed foam: 2,55kg - 5.62lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

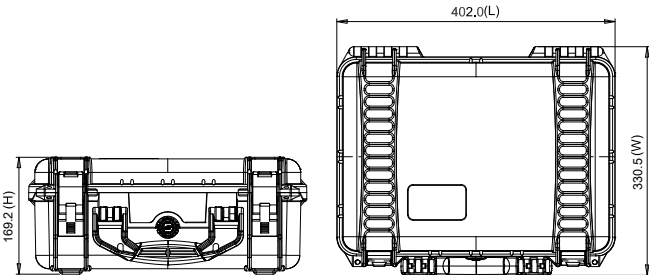

HPRC5200 for Blackmagic Studio Camera 6K Pro/4K Pro G2/4K Plus S-BMS-5200-01




TECHNICAL FEATURES

Dimension:
Internal dimension
772x302x210(mm) - 30.39x11.89x8.26(in)
External dimension:
802x355x246,7(mm) - 31.57x13.97x9.71(in)

Weight:
empty: 5,05kg - 11.10lbs
with cubed foam: 6,20kg - 13.70lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

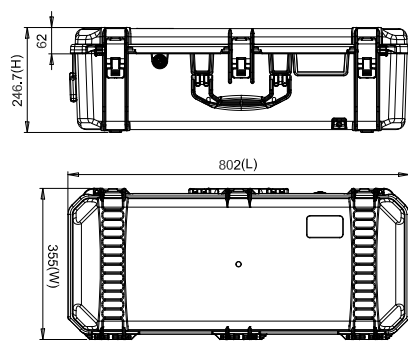

HPRC BLACKMAGIC STUDIO CAMERA 6K PRO/4K PRO G2/4K PLUS

HPRC2760W for Blackmagic Design Atem
 Television Studio 4K8 /HD8 /HD8 ISO
 + ATEM Microphone Converter
S-ATS-2760W-01



- 1 Atem Television Studio 4K8 / HD8 / HD8 ISO
- 2 Atem Microphone Converter



TECHNICAL FEATURES


Dimension:
 Internal dimension
 690x450x301(mm) - 27.16x17.72x11.85(in)
 External dimension:
 750x511x329(mm) - 29.53x20.12x12.95(in)

Weight:
 empty: 8,93kg - 19.69lbs
 with cubed foam: 10,72kg - 23.63lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

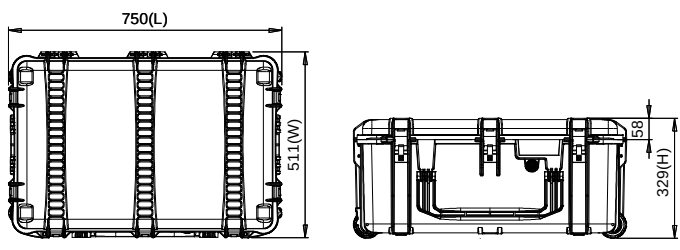

HPRC2710 for Blackmagic Design Atem Camera Control Panel

S-ACCP-2710-01

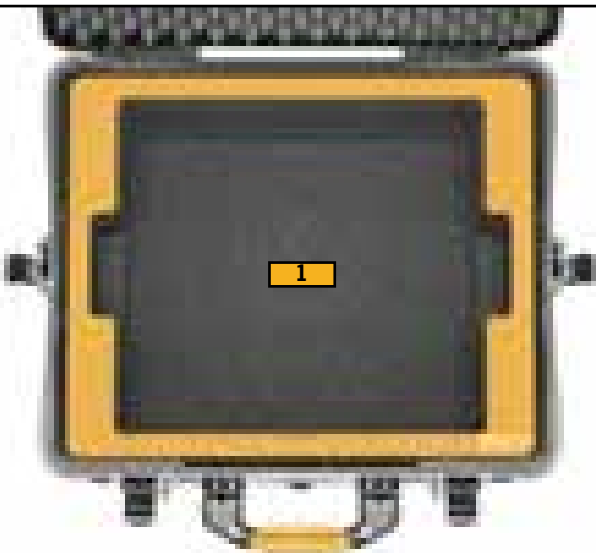

1 Atem Camera Control Panel



HPRC BLACKMAGIC ATEM

TECHNICAL FEATURES

Dimension:

Internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
External dimension:
617x525x280(mm) - 24.29x20.67x11.02(in)


Weight:

empty: 6,56kg - 14.46lbs
with cubed foam: 7,96kg - 17.55lbs

Temperature rating:


Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

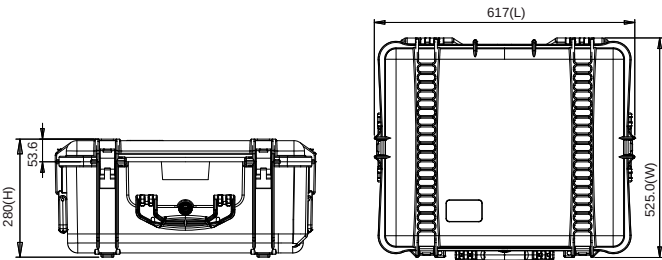

HPRC2300 for Atem Mini, Atem Mini Pro and Atem Mini Pro ISO

AMI-2300-01

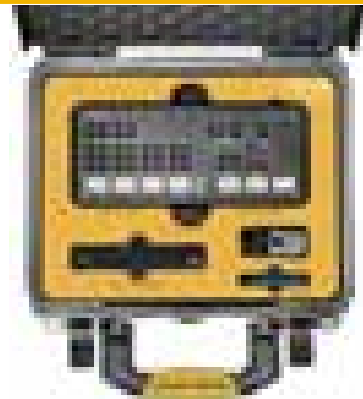

- 1 Atem Mini/Mini Pro/Mini Pro ISO
- 2 Charger
- 3 Angelbird SSD2GO
- 4 Blackmagic Atem Streaming Bridge
- 5 HDMI cables/Miscellaneous



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

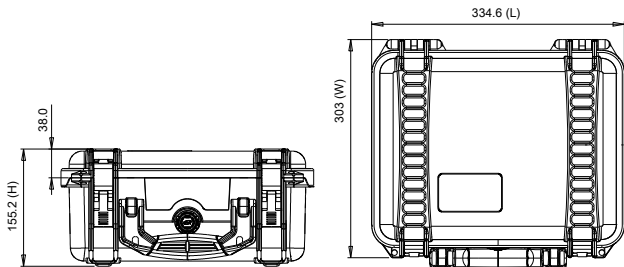

AME-2500-01

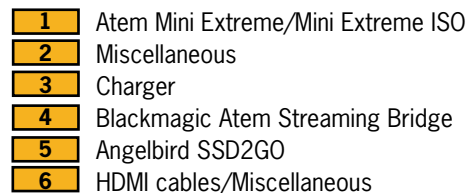

Dimension:
internal dimension
449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
external dimension
478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

empty: 3,08kg - 6.79lbs
with cubed foam: 3,71kg - 8.18lbs

Minimum	Maximum
-40°C -40°F	+80°C +176°F



HPRC2710 for Blackmagic Atem 1 M/E

ADV1-2710-01




Blackmagicdesign

1 Blackmagic Design Atem 1 M/E Advanced Panel



TECHNICAL DRAWING

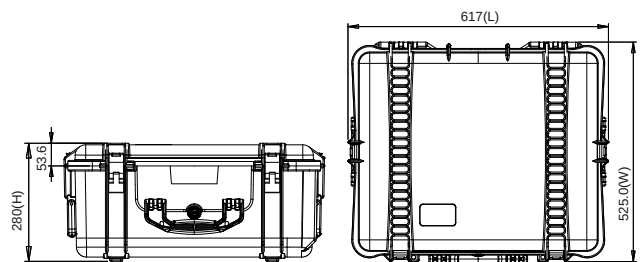

TECHNICAL FEATURES

Dimension:
internal dimension
555x459x256(mm) - 21.85x18.07x10.08(in)
external dimension
617x525x280(mm) - 24.29x20.67x11.02(in)


Weight:
empty: 6,43 kg - 14.18 lbs
with foam: 7,45 kg - 16.42 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

HPRC2730W for Blackmagic Ursa Mini Pro/Broadcast URS2730W-03



- 1** BlackMagic Ursa Mini Pro / Broadcast with shoulder pad and top handle mounted
- 2** Tripod Plate
- 3** Shoulder Mount kit - Rods clamps
- 4** Batteries
- 5** Lens
- 6** Accessories / Cables
- 7** HPRC1100 Memory card holder for CFast/SDHC cards
- 8** Charger standard and Charger SWIT S-3802S



HPRC BLACKMAGIC URSA MINI PRO

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

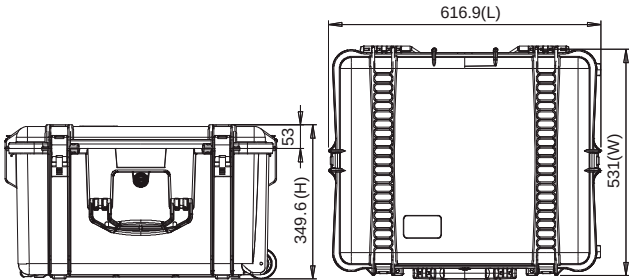



SONY

HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for Sony Alpha 7 ALP2460-01



FOR SONY ALPHA 7

HPRC2460 for ALPHA 7 is a special edition, designed to safely carry your SONY Alpha Series.



- 1** Sony A7/A7R/A7S/A7II/A7RII/A7SII / A7SIII / a6300/ Alpha 7 with or without professional cage and lenses mounted (EF/F/PL-Mount/Leica R)
- 2** Lenses: Sony FE 50/1.4, 50/2,8 Macro, 24-70/2.8 G, 85/1,4 G, 16-35/4, 24-70/4, 28-70/3.5-5.6, 28/2.0 - SONY ZA 35/2.8, 35/1.4, 50/1.4, 50/1,8 55/1.8/ 10-18/4 - Zeiss Loxia 21/2.8, 35/2.0, 50/2.0
- 3** Battery chargers, cables
- 4** Accessories (baseplate, rods, top grip handles, lockports, cables, batteries, controllers, GoPro)
- 5** external recorder Atomos/Sound Device etc



TECHNICAL FEATURES


Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,57kg - 5.65lbs
 with cubed foam: 2,97kg - 6.55lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

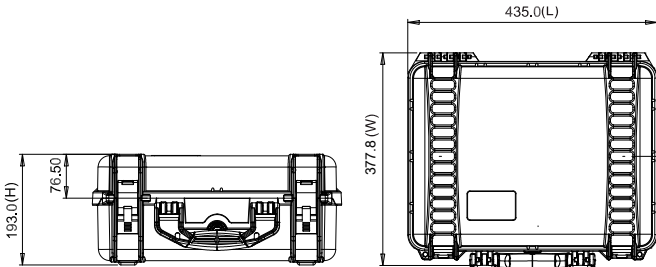

HPRC2400 for Sony FX3 FX3-2400-01



- 1 Sony FX3
- 2 Lenses: Diameter Max 90mm × Length Max 220mm
- 3 XLR Handle Unit
- 4 Battery Charger BC-QZ1
- 5 Battery NP-FZ100
- 6 Cable



TECHNICAL FEATURES


Dimension:
 Internal dimension
 377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
 External dimension
 402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
 empty: 2,49kg - 5.48lbs
 with cubed foam: 3,20kg - 7.04lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

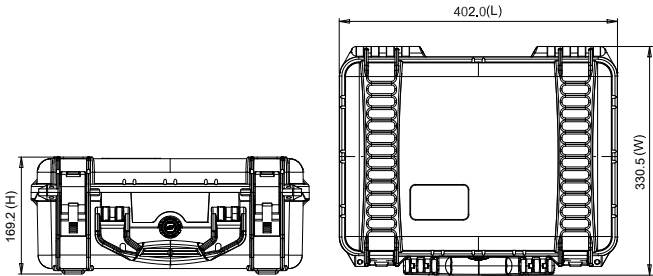

HPRC2550W for Sony ILME-FX6

FX6-2550W-01

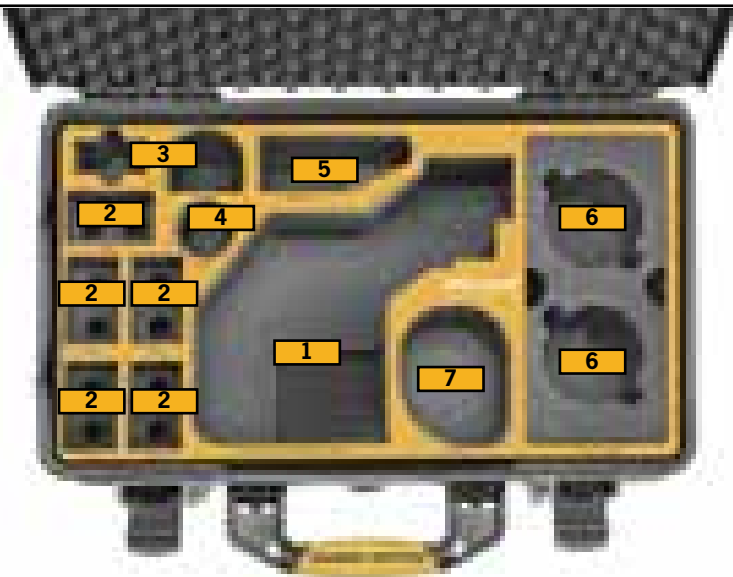

- 1 Sony ILME-FX6 Cinema Line + Smart Handle
- 2 BP-U35 or BP-U100 Battery
- 3 Charger
- 4 Cables
- 5 LCD Monitor 3,5"
- 6 2x Lenses GM or x Tele GM
- 7 Smart Grip



HPRC SONY ILME-FX6

TECHNICAL FEATURES


Dimension:
internal dimension
513x288x200(mm) - 20.19x11.34x7.87(in)
external dimension
549x346x236(mm) - 21.61x13.62x9.29(in)

Weight:
empty: 4,35kg - 9.57lbs
with foam: 5,04kg - 11.10 lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

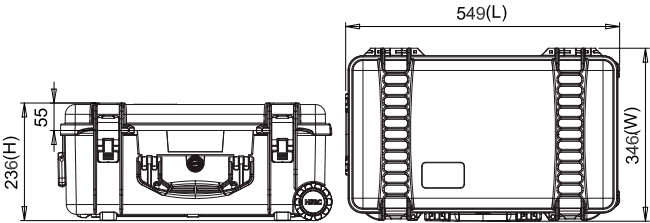

HPRC2700W for Sony PXW-FX9 FX9-2700W-01



SONY
 PXW-FX9



- 1 Sony Camcorder
- 2 Viewfinder LCD
- 3 External Microphone
- 4 Battery Sony BP-U Series
- 5 Lens Adapter Metabones
- 6 Sony XQD/SD Card
- 7 Canon CNE Prime Lens
- 8 Cine Lenses up to 105mm Ø
- 9 Photo Lenses up to 105mm Ø
- 10 Hand Grip
- 11 Cable
- 12 Charger
- 13 HPRC1100 MEMBLB



TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs
 with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

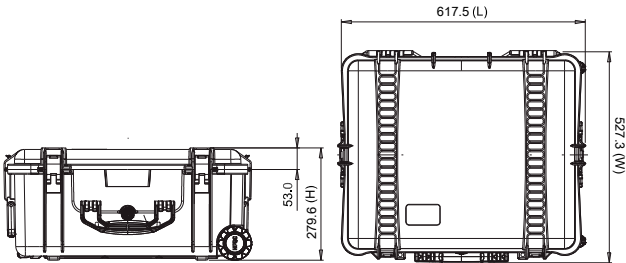

HPRC2700W for Sony Burano 8K Camera

Cinema Line

S-BRN-2700W-01

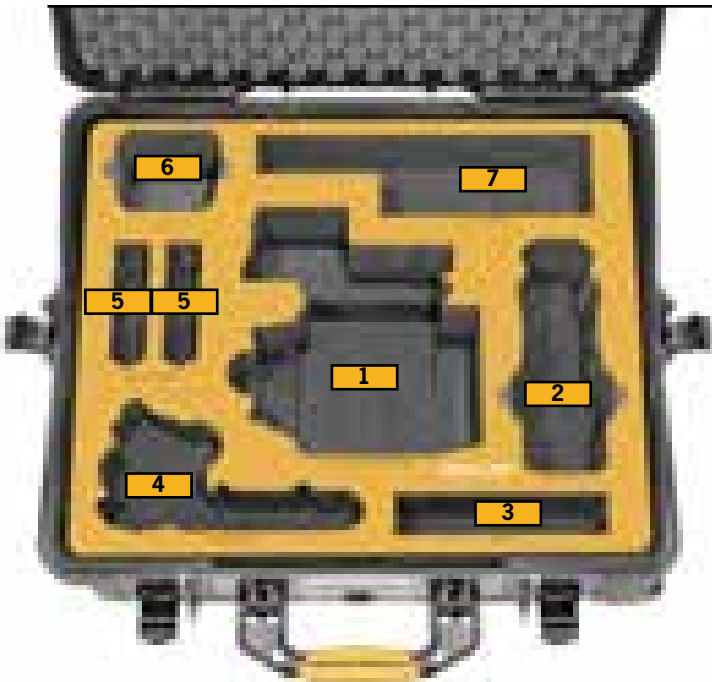

- 1
- Sony Burano 8K Camera with Handle (3 options) & PL mount
- 2
- Viewfinder with Mounted LCD Monitor
- 3
- Accessories
- 4
- Remote Control Grip GP-VR100
- 5
- HPRC 1300 CFEBLB Cards Holder
- 6
- Batteries
- 7
- Miscellaneous / Card Reader



HPRC SONY BURANO 8K CAMERA CINEMA LINE

TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension:
617,5x527,3x279,6(mm) - 24.31x20.76x11(in)

Weight:
empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

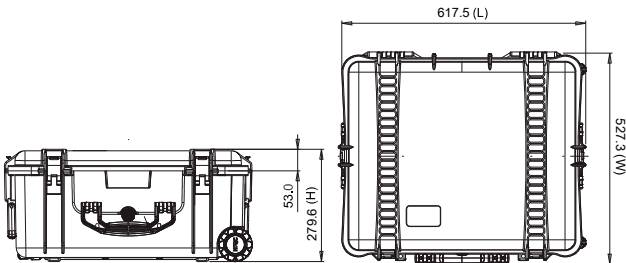

HPRC4400 for Sony ILME-FR7

S-FR7-4400-01

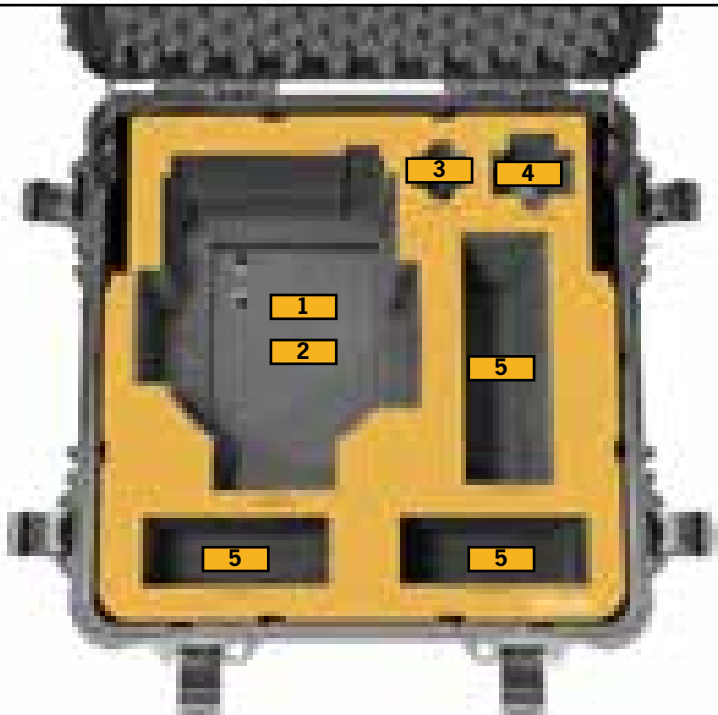

- 1 Sony Ilme FR7
- 2 Miscellaneous
- 3 Remote Controller
- 4 Cables Adaptors/Charger
- 5 Various/Miscellaneous




TECHNICAL FEATURES

Dimension:
Internal dimension:
420x420x389(mm) - 16.54x16.54x15.31(in)
External dimension:
482x481x437(mm) - 18.98x18.94x17.20(in)

Weight:
empty: 6,70kg - 14.77lbs
with cubed foam: 8,90kg - 19.62lbs


Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

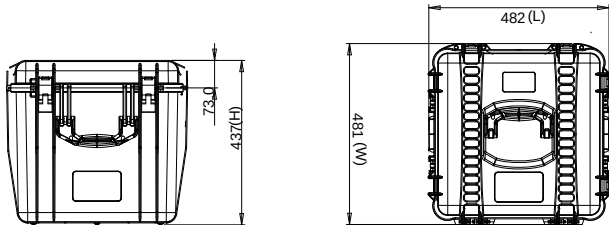

HPRC2460 for Sony IP500 PTZ Camera Remote Controller

S-IP500-2460-01

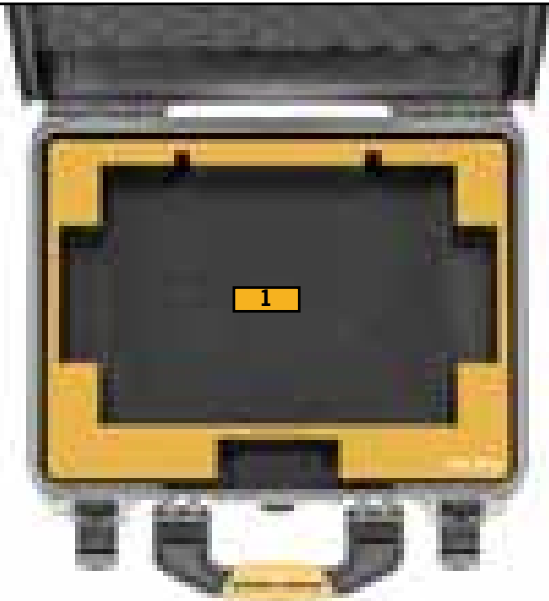

1 Sony IP500 PTZ Camera Remote Controller



HPRC SONY IP500 PTZ CAMERA REMOTE CONTROLLER

TECHNICAL FEATURES

Dimension:

Internal dimension:
409x306x175(mm) - 16.10x12.05x6.89(in)
External dimension:
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:


empty: 2,55kg - 5.62lbs
with cubed foam: 3,14kg - 6.92lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

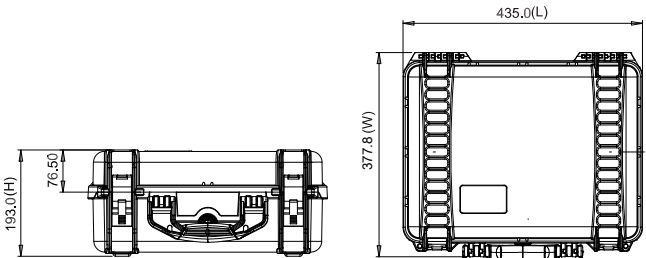

HPRC2600W for Sony PXW-Z280

Z280-2600W-01

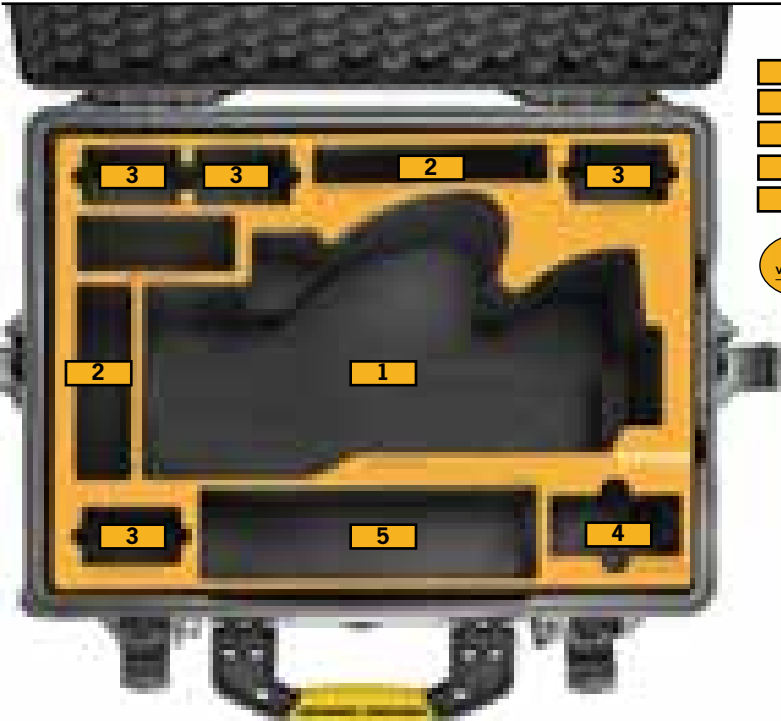

- 1 Sony Camcorder PXW-Z280
- 2 Cables/Accessories/Miscellaneous
- 3 Battery Sony BPU – U60
- 4 Compact 4K Wide Conversion
- 5 Microphone



TECHNICAL FEATURES


Dimension:
Internal dimension
482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
External dimension
546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:
empty: 6,05kg - 13.34lbs
with cubed foam: 6,97kg - 15.37lbs

Temperature rating:
Minimum
-40°C -40°F
Maximum
+80°C +176°F



TECHNICAL DRAWING

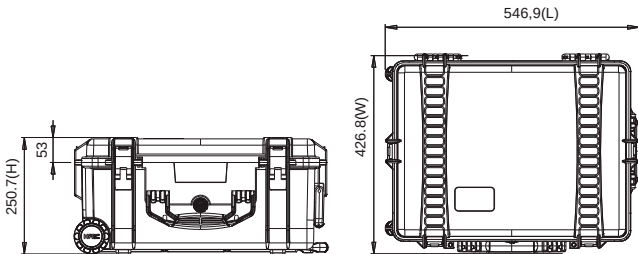

HPRC2700W for Sony PXW-Z190V

Z190-2700W-01



SONY
PXW-Z190V



- 1 Sony Camcorder PXW-Z190VC
- 2 BC-U1 battery charger
- 3 Battery Sony BPU \Swit S-8U63
- 4 Microphone
- 5 Wireless Audio Set Sony UWP-D11/K51PRO
- 6 Cables/Accessories/Miscellaneous



TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,75kg - 17.09lbs
with cubed foam: 9,07kg - 19.99lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

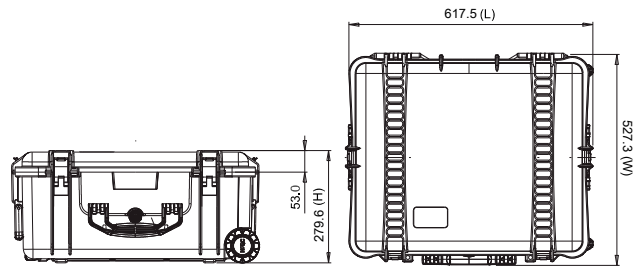

HPRC SONY PXWZ190V



CANON

HPRC READY MADE SOLUTIONS – 2025

HPRC2300 for Canon Eos R5 / R6

CR5-2300-01



- 1 Canon Eos R5 / R6 Mirrorless Digital Camera (with or without professional cage)
- 2 Lenses: Diameter Max 90mm x Length Max 220mm
- 3 Cable/Miscellaneous
- 4 LC-E6 Charger for LP-E6 Battery Pack
- 5 LP-E6NH Lithium-Ion Battery (7.2V, 2130mAh)



TECHNICAL FEATURES


Dimension:
Internal dimension
305,7x232,4x137,5(mm) - 12.04x9.15x5.41(in)
External dimension
334,6x303x155,2(mm) - 13.17x11.93x6.11(in)

Weight:
empty: 1,75kg - 3.86lbs
with cubed foam: 1,90kg - 4.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

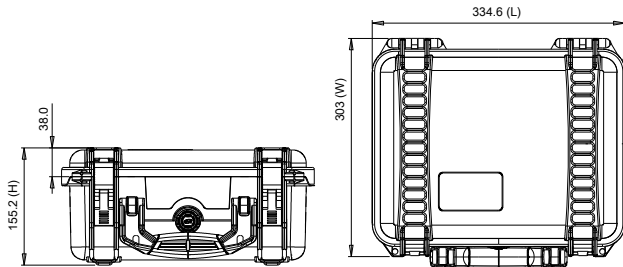

HPRC CANON EOS R5 / R6

HPRC2700W for Canon Eos C300 Mark III / Eos C500 Mark II **C300-2700W-01**



- 1 Eos C300 Mark III / Eos C500 Mark II Body
- 2 Lens CN-E18-80
- 3 Lens 110/90 mm diameter, depth 180mm
- 4 Monitor
- 5 Handle
- 6 Charger
- 7 Various/Cable
- 8 Battery BP-A30/BP-A60
- 9 Charger
- 10 HPRC1100MEM



TECHNICAL FEATURES


Dimension:
 Internal dimension
 554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
 External dimension
 617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
 empty: 7,75kg - 17.09lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

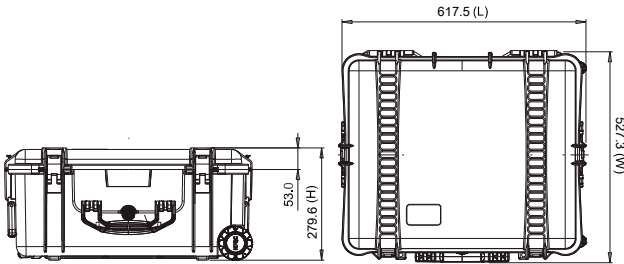

HPRC2600 for Canon Eos C70

C70-2600-01



- 1 Canon Eos C70
- 2 Batteries BP-A60/BP-A30
- 3 Lens Canon RF 24-105 or similar
- 4 Lens Canon RF 15-35 or similar
- 5 Lens Canon RF 70-200 or similar
- 6 Lens Canon RF 24-70 or similar
- 7 Canon Adapter EF-RF 0.71x
- 8 HPRC1300MEMBLB
- 9 CA-CP200L
- 10 Miscellaneous
- 11 Battery Charger CG-A20 OTH
- 12 Handle unit




HPRC CANON EOS C70

TECHNICAL FEATURES

Dimension: internal dimension 482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in) external dimension 543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)	
Weight: empty: 4,25kg - 9.37lbs with cubed foam: 5,05kg - 11.13lbs	
Temperature rating: Minimum Maximum -40°C -40°F +80°C +176°F	

TECHNICAL DRAWING

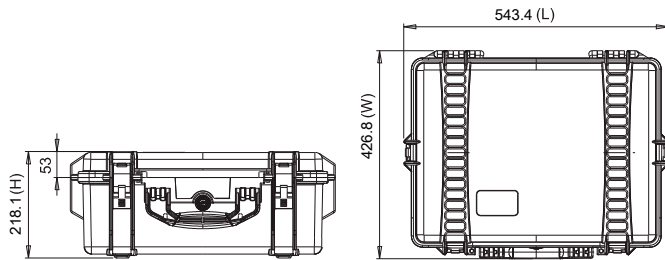

HPRC2600 for Canon Eos C200

C200-2600-01



- 1 Canon Eos C200 With Camera Grip Mounted
- 2 Handle Unit Hdu-2
- 3 Monitor Lcd Lm-V1, Lcd La-V1
- 4 Compact Power Adaptor Ca-A10
- 5 Compact Adaptor Cp200b
- 6 Lenses Ef85mm/16-35/24-70/24-105Mm
- 7 HPRC1100MEM
- 8 Battery Pack A30/A60
- 9 Battery Charger A-20
- 10 Miscellaneous Accessories
- 11 Screw
- 12 Allen Key




TECHNICAL FEATURES

Dimension:
internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
empty: 4,31kg - 9.50lbs
with cubed foam: 4,84kg - 10.663lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

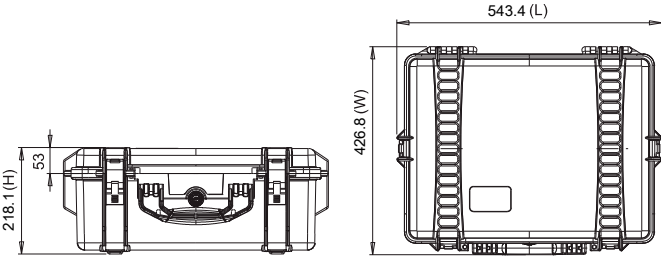

HPRC2600 for Canon Eos C100

C100-2600-01



- 1 Canon Eos C100 With Viewfinder and Camera Grip Mounted
- 2 Handle Unit
- 3 Lenses Ef85mm/16-35/24-70/24-105Mm
- 4 Battery Pack Bp 955
- 5 Battery Pack Bp 975
- 6 Battery Charger Cg-940
- 7 Compact Adaptor Ca-941
- 8 Miscellaneous Accessories
- 9 HPRC1100MEM




TECHNICAL FEATURES

Dimension:
internal dimension
482,4x358,3x198,1(mm) - 18.99x14.1x7.8(in)
external dimension
543,4x426,8x218,1(mm) - 21.39x16.8x8.59(in)

Weight:
empty: 4,25kg - 9.37lbs
with cubed foam: 5,05kg - 11.13lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING


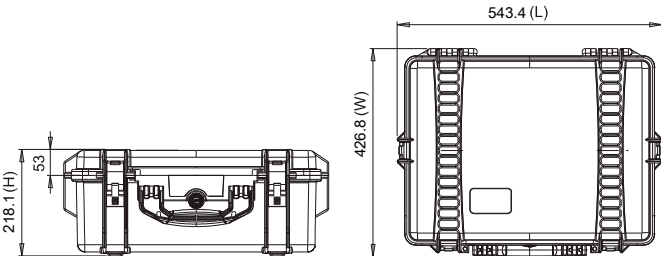




MOZA

HPRC READY MADE SOLUTIONS - 2025

HPRC2530 for Moza Air2 Ifocus MAIR2-2530-01

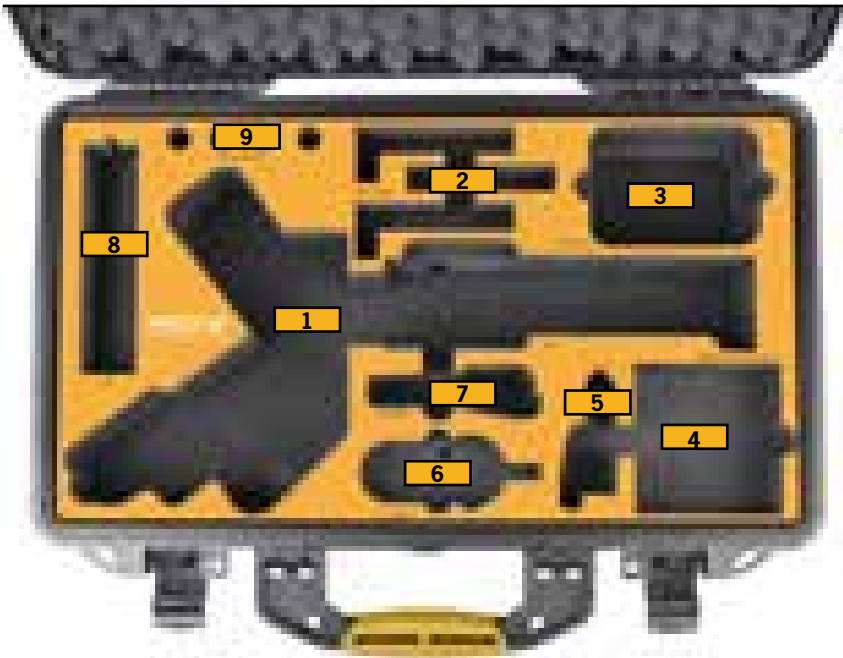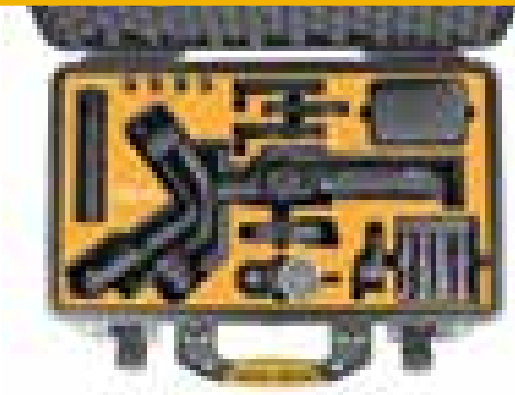

- 1 Gimbal
- 2 Quick Release Plate
- 3 Cable storage bag
- 4 Intelligent Charger and 18650 batteries
- 5 Ifocus M
- 6 Ifocus Handunit
- 7 Ifocus Motor
- 8 Tripod
- 9 Follow focus install pipe



TECHNICAL FEATURES


Dimension:
 internal dimension 513x288x132(mm) - 20.20x11.34x5.20(in)
 external dimension 540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
 empty: 3,20kg - 7.05lbs
 with cubed foam: 3,26kg - 7.19lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

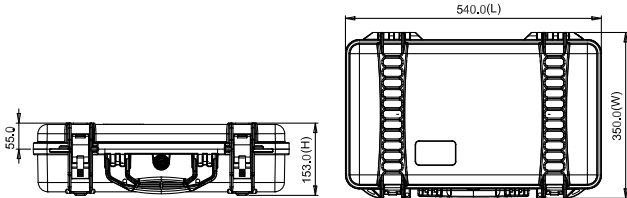




ZHIYUN CRANE

HPRC READY MADE SOLUTIONS – 2025

HPRC2700W for Zhiyun Crane 3 Lab

Master package

CR3-2700W-01

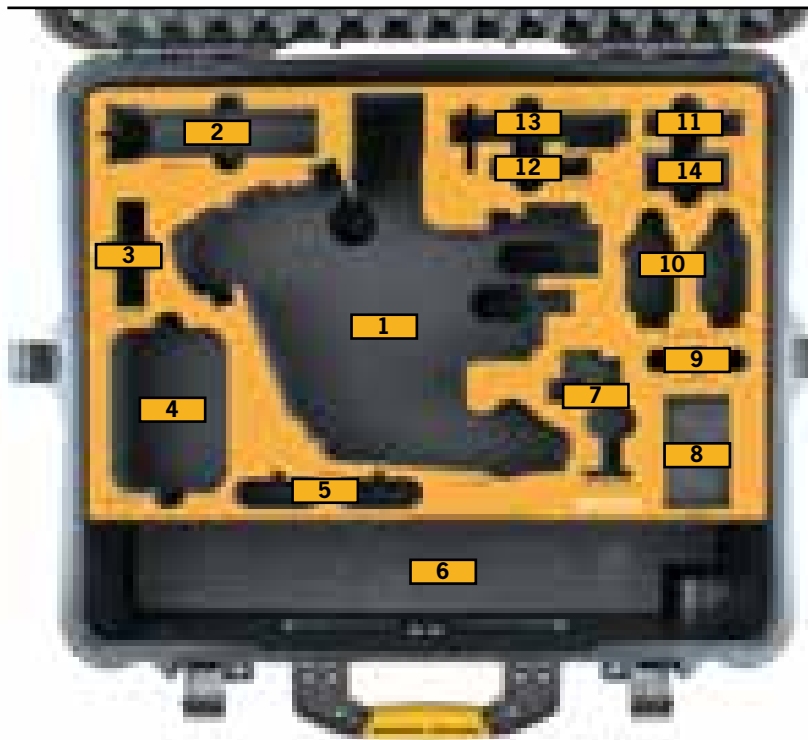

- 1 Crane 3 Lab Stabilizer
- 2 Handheld Tripod
- 3 Battery Charger
- 4 Cable Storage Case
- 5 Quick Setup Kits
- 6 Telescopic Monopod with Locking Buckle and Multifunctional Camera Belt
- 7 Phone Holder with Crown Gear
- 8 Miscellaneous
- 9 Batteries 18650
- 10 Focus and Zoom Combo Kits
- 11 Cable
- 12 Quick Release Base Plate
- 13 Quick Release Plate
- 14 HPRC1100 (not included)



HPRC ZHIYUN CRANE 3

TECHNICAL FEATURES


Dimension:
Internal dimension
554,7x458,7x246(mm) - 21.84x18.06x9.69(in)
External dimension
617,5x527,3x279,6(mm) - 24.31x20.76x11.0(in)

Weight:
empty: 7,74kg - 17.06lbs
with cubed foam: 8,84kg - 19.49lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

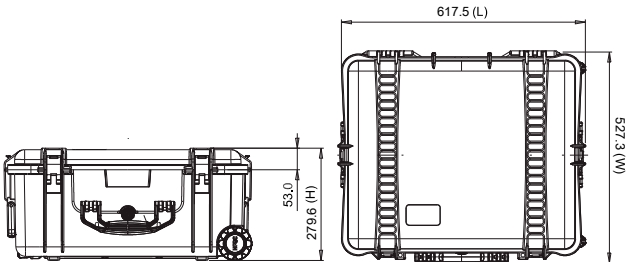

HPRC2600W for Zhiyun Crane 3 Lab CR3-2600W-01



- 1 Crane 3 Lab Stabilizer
- 2 TransMount Handheld Tripod
- 3 Battery Charger
- 4 Batteries 18650
- 5 Cable Storage Case
- 6 Quick Release Plate
- 7 TransMount Phone Holder



TECHNICAL FEATURES


Dimension:
 Internal dimension
 482,4x358,3x217,6(mm) - 18.99x14.1x8.57(in)
 External dimension
 546,9x426,8x250,7(mm) - 21.53x16.8x9.87(in)

Weight:
 empty: 6,05kg - 13.34lbs
 with cubed foam: 6,97kg - 15.37lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

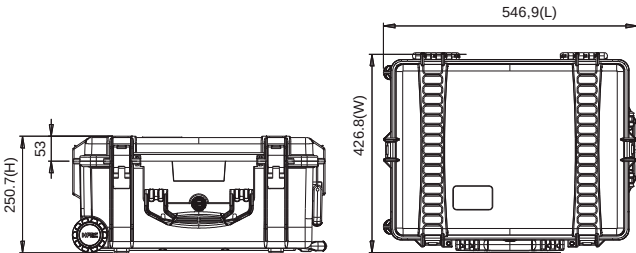





Z CAM

HPRC READY MADE SOLUTIONS – 2025

HPRC2400 for Z Cam E2-F6 Full Frame 6K Cinema Camera

ZE2F6-2400-01



- 1 Z Cam E2-F6 Full Frame 6K Cinema Camera with SmallRig Cage mounted
- 2 Alternative Lens Mount
- 3 Accessories
- 4 Charger
- 5 Cable
- 6 NF-P Battery
- 7 CFast 2.0
- 8 WiFi Antenna



HPRC Z CAM E2-F6

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,23kg - 4.91lbs
with cubed foam: 2,49kg - 5.49lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

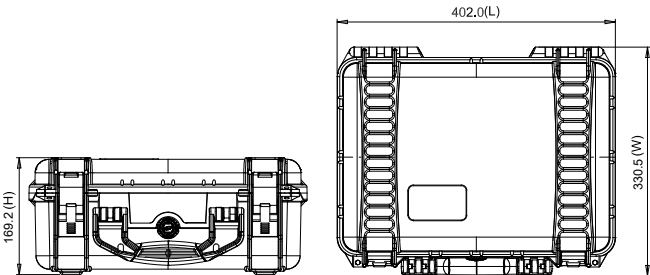



FUJIFILM

HPRC READY MADE SOLUTIONS – 2025

HPRC2500 for Fujifilm GFX100 GFX100-2500-01



- 1 Fujifilm GFX100
- 2 Cable storage/Miscellaneous
- 3 Adjustable lens: FUJIFILM GF 110mm f/2 R LM WR Lens, 23mm f/4 R LM WR Lens, 45mm f/2.8 R WR Lens, 32-64mm f/4 R LM WR Lens
- 4 Battery charger
- 5 Battery NP-T125
- 6 Ac Power Adapter



TECHNICAL FEATURES


Dimension:
 internal dimension
 449,8x322,9x174,9(mm) - 17.71x12.71x6.89(in)
 external dimension
 478,1x389,4x194(mm) - 18.82x15.33x7.64(in)

Weight:
 empty: 3,22kg - 7.10lbs
 with cubed foam: 3,75kg - 8.27lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

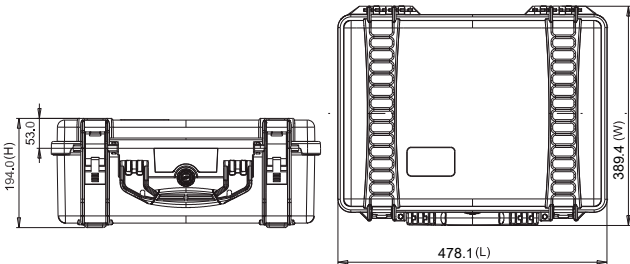




RED

HPRC READY MADE SOLUTIONS – 2025

HPRC2730W for Red Ranger Gemini RGE-2730W-01

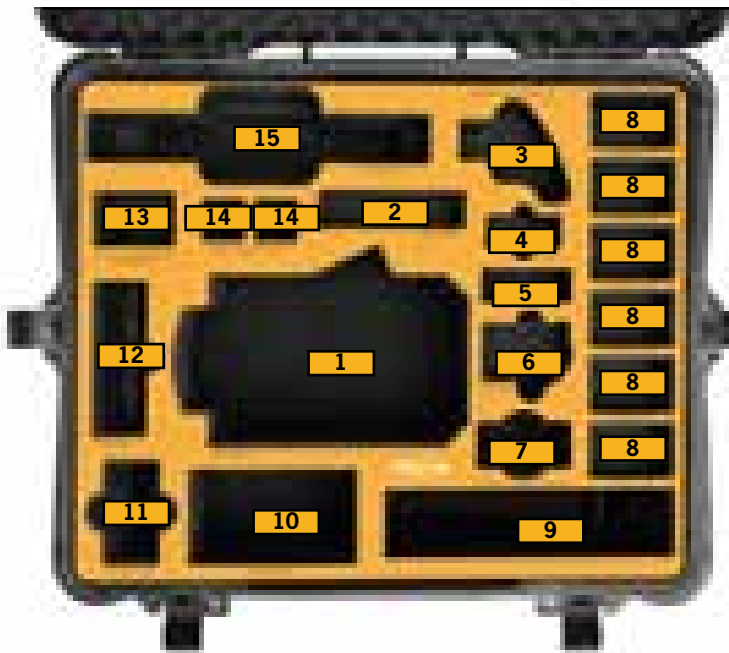

- 1 Camera with Top Handle
- 2 HPRC1300 MEVBLB
- 3 Right Side Wooden Handle 2.0 with R/S Button - Tilta
- 4 Red Mini Mag
- 5 Cable
- 6 Red Bomb EVF DSMC
- 7 Titan Support Arm with Single 1/4" QR Bracket – Monitor Side
- 8 GDU 98Wh Mini V-Lock Battery
- 9 Cable
- 10 BlueShape Travel Charger
- 11 Red Ranger Ac Power Adaptor
- 12 DSMC2 Red Touch 7.0" LCD
- 13 Smallrig for monitor LCD EVF Mount/BMVA/SmallHD, Zacuto Gratical HD1938
- 14 Smallrig Rosette Arm Handle for Shoulder Stabilizer
- 15 Quick Release Platform



HPRC RED RANGER GEMINI

TECHNICAL FEATURES


Dimension:
 internal dimension
 503x459x316(mm) - 19.80x18.07x12.44(in)
 external dimension
 616,9x531x349,6(mm) - 24.29x20.91x13.76(in)

Weight:
 empty: 8,41kg - 18.54lbs
 with cubed foam: 10,43kg - 22.99lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

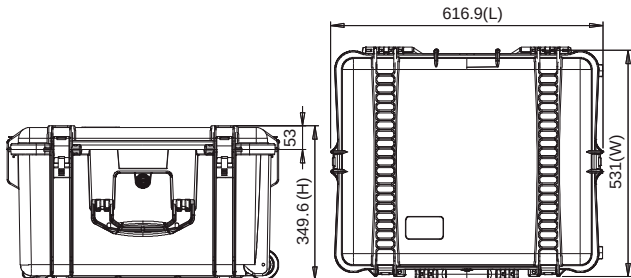



NIKON

HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for Nikon D850

D850-2460-01



for **NIKON D850**



- 1** D850 Camera Body
- 2** Additional EN-EL15a Rechargeable Li-ion Battery
- 3** ME-W1 Wireless Microphone
- 4** ME-1 Stereo Microphone
- 5** Atomos Ninja Flame
- 6** Lenses: AF-S NIKKOR 35mm f/1,8G ED / AF-S NIKKOR 85mm f/1.8G / AF-S NIKKOR 20mm f/1,8G ED
- 7** MH-25A Battery Charger/ UC-E22 USB Cable / Coiled HDMI Cable

HPRC NIKON D850

TECHNICAL FEATURES


Dimension:
internal dimension
409x306x175(mm) - 16.1x12.05x6.89(in)
external dimension
435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
empty: 2,55kg - 5.62lbs
with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

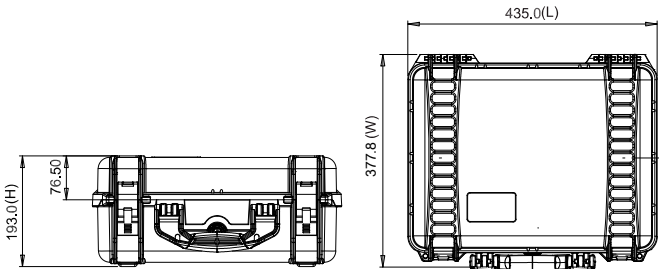

The image features a Panasonic GH5 camera with a lens attached, positioned in the lower-left foreground. Behind it is a large, black, ruggedized GH5S weather-sealed case, which is partially open, revealing its interior compartments. The case has a prominent latch and a handle on the right side. The background is a dark, textured surface.

PANASONIC

HPRC READY MADE SOLUTIONS – 2025

HPRC2460 for Panasonic GH5 S-GH52460-01



TECHNICAL FEATURES


Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

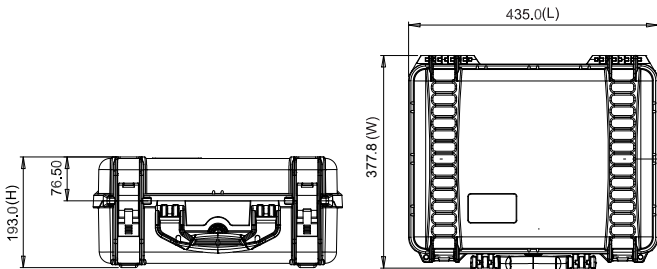

HPRC2460 for PANASONIC GH5 is a special edition, designed to safely carry your GH5 Lumix G Series.



LEICA

Leica

LEICA

HPRC READY MADE SOLUTIONS – 2025

HPRC2400 for Leica M

LEM2400-01



- 1 1 x Leica M Camera Body with Lens Attached
- 2 Electronic Viewfinder
- 3 4 x Lens
- 4 Charger
- 5 Spare Battery
- 6 Cables/Miscellaneous

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14,84x10,39x5,94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

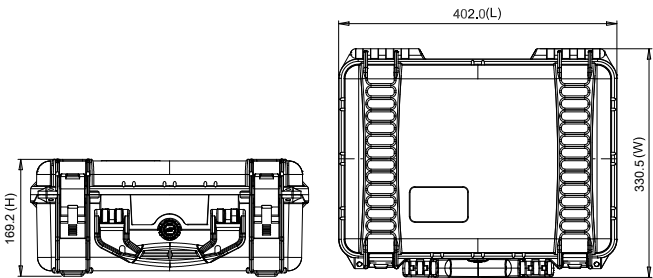

HPRC2460 for Leica M LEM2460-01



- 1 2 x Leica M Camera Body with Lens Attached
- 2 2 x Electronic Viewfinder
- 3 2 x Spare Batteries
- 4 4 x Lens
- 5 2 x Charger
- 6 Cables/Miscellaneous

TECHNICAL FEATURES


Dimension:
 internal dimension
 409x306x175(mm) - 16.1x12.05x6.89(in)
 external dimension
 435x377,8x193(mm) - 17.13x14.87x7.60(in)

Weight:
 empty: 2,55kg - 5.62lbs
 with cubed foam: 3,14kg - 6.92lbs

Temperature rating:
 Minimum Maximum
 -40°C -40°F +80°C +176°F



TECHNICAL DRAWING

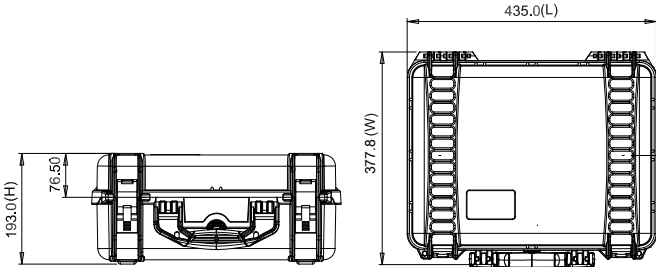



11 76
8
11
16






APPLE

HPRC READY MADE SOLUTIONS – 2025

HPRC2530 for Apple Mac Studio / Mac Mini

STU-2530-01

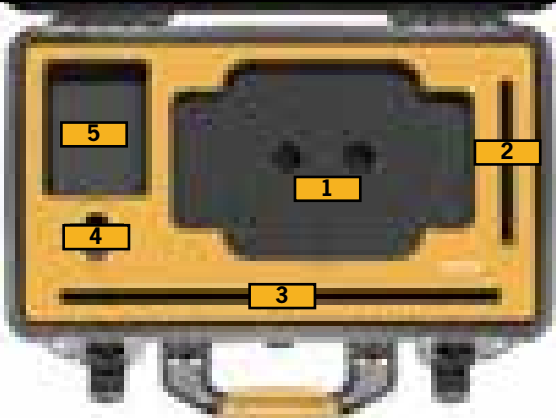

- 1 Mac Studio / Mac Mini
- 2 Magic Trackpad
- 3 Magic Keyboard
- 4 Magic Mouse
- 5 Cable/Miscellaneous




MAC STUDIO LAYOUT

Just remove the additional foam **2** from the main slot **1**.
The case is ready to house and protect your Mac Studio.



MAC MINI LAYOUT

Keep the additional foam **2** in the main slot **1**.
Your Mac Mini can be placed above. Safe and sound.

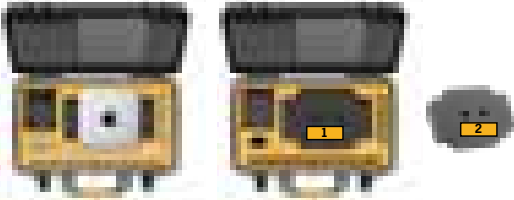

TECHNICAL FEATURES


Dimension:
Internal dimension:
513x288x132(mm) - 20.20x11.34x5.20(in)
External dimension:
540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:
empty: 3,20kg - 7.05lbs
with cubed foam: 3,26kg - 7.19lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

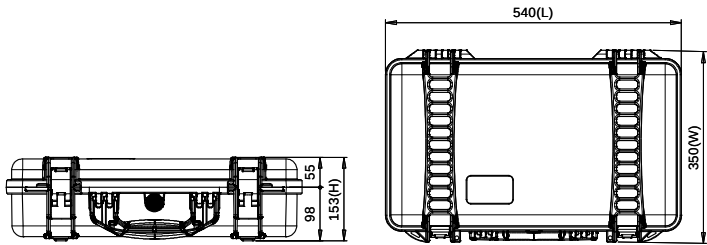

HPRC APPLE MAC STUDIO / MAC MINI

HPRC2530 for MacBook Pro 16” MPRO-2530-01

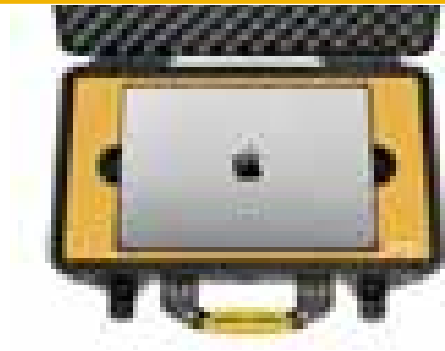

- 1

MacBook Pro 16”
- 2

Miscellaneous



TECHNICAL FEATURES

Dimension:

Internal dimension
 513x288x132(mm) - 20.20x11.34x5.20(in)
 External dimension
 540x350x153(mm) - 21.26x13.78x6.02(in)

Weight:


empty: 2,84kg - 6.26lbs
 with foam: 3,25kg - 7.16lbs

Temperature rating:

Minimum Maximum
 -40°C -40°F +80°C +176°F




TECHNICAL DRAWING

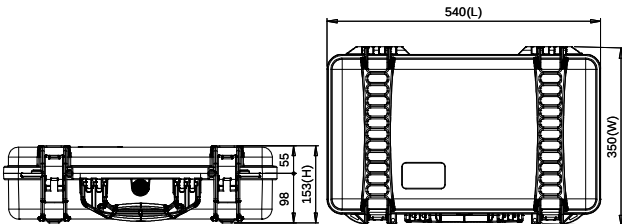

HPRC4800W for Apple Mac Pro

MPRO-4800W-01

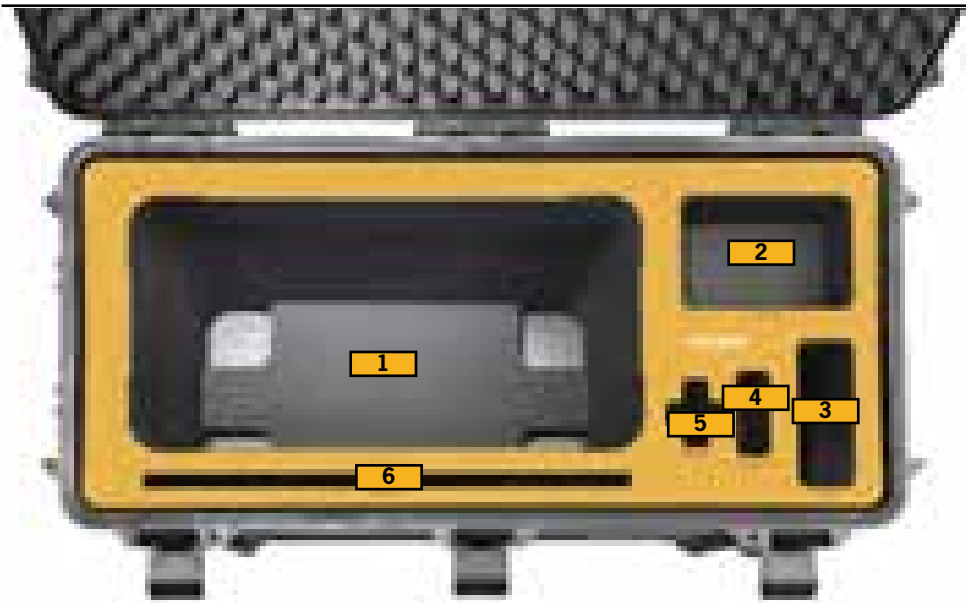

- 1 Mac Pro
- 2 Miscellaneous
- 3 Power cord
- 4 USB-C to Lightning Cable
- 5 Magic Mouse 2
- 6 Magic Keyboard



HPRC APPLE MAC PRO

TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:


empty: 10.00kg - 22.21lbs
with cubed foam: 14.10kg - 31.08lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

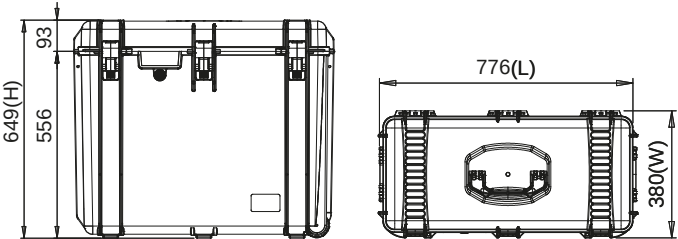

HPRC2400 for MacPro15"

MPRO-2400-01



- 1 MacBook Pro 15"
- 2 Miscellaneous



HPRC APPLE MACPRO 15"

TECHNICAL FEATURES


Dimension:
Internal dimension
377x263,9x150,8(mm) - 14.84x10.39x5.94(in)
External dimension
402X330,5X169,2(mm) - 15.83x13.01x6.66(in)

Weight:
empty: 2,38kg - 5.25lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

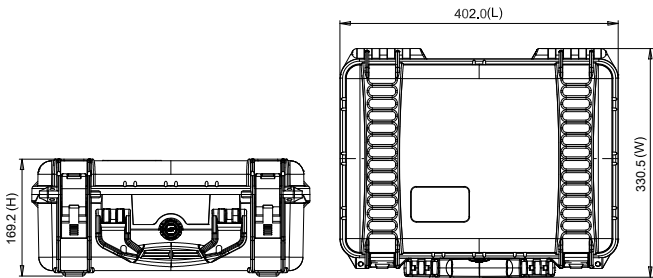







EIZO

HPRC READY MADE SOLUTIONS – 2025

HPRC4800W for Eizo 27/24"

EIZ27-4800W-01

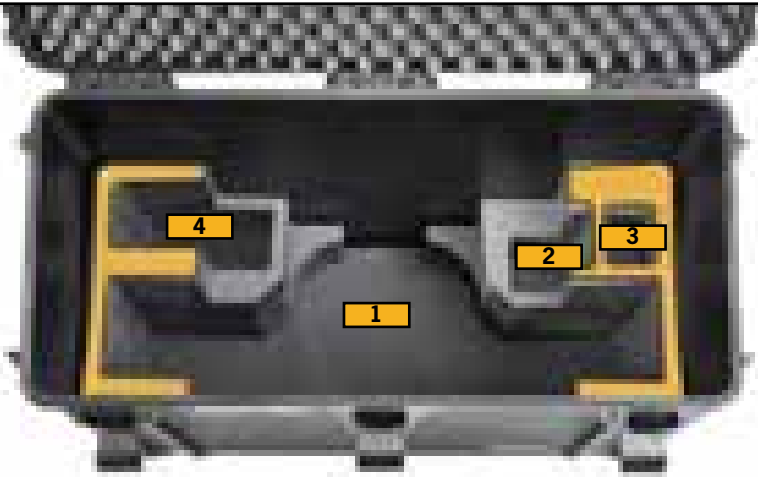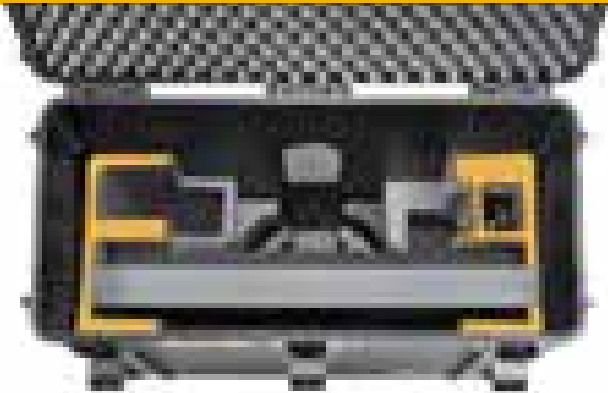

- 1 Eizo Monitor 27" or 24"
- 2 Cables and accessories
- 3 Cables and accessories
- 4 Protective hood and accessories



HPRC EIZO 27/24"

TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:


empty: 11,12kg - 24.50lbs
with cubed foam: 12,43kg - 27.40lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

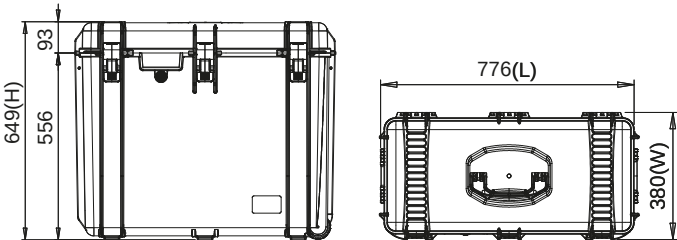



UNIVERSAL MICROPHONES

HPRC READY MADE SOLUTIONS – 2025

HPRC2200 for 3 Universal Microphones

MCF3-2200-01



1 Universal Microphone



HPRC MICROPHONES

TECHNICAL FEATURES


Dimension:
internal dimension
236x182x108(mm) - 9.29x7.17x4.25(in)
external dimension
258x244,3x123,3(mm) - 10.16x9.62x4.85(in)

Weight:
empty: 0,87kg - 1.92lbs
with cubed foam: 1,08kg - 2.38lbs

Temperature rating:
Minimum Maximum
-40°C -40°F +80°C +176°F




TECHNICAL DRAWING

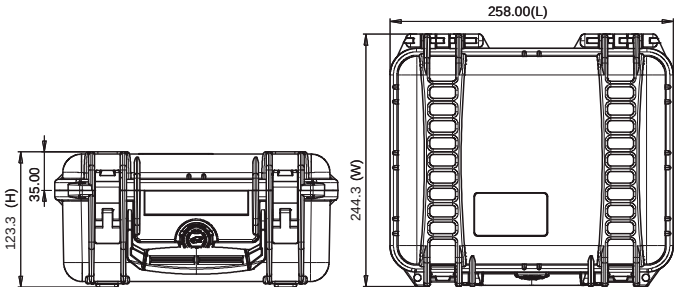

HPRC2250 for 6 Universal Microphones

MCF6-2250-01

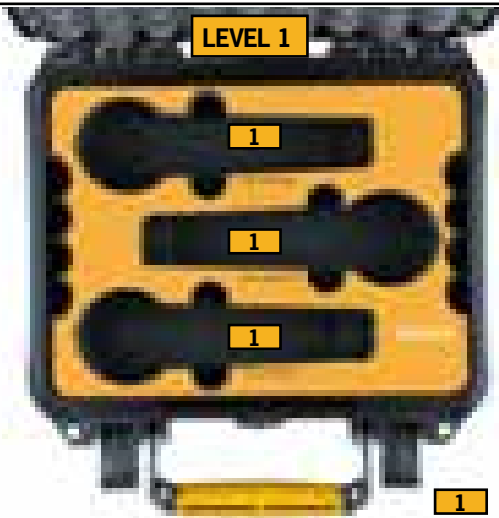

1 Universal Microphone



TECHNICAL FEATURES

Dimension:

internal dimension
236x182x155(mm) - 9.29x7.17x6.10(in)
external dimension
258X230X170(mm) - 10.16x9.06x6.69(in)

Weight:


empty: 1,00kg - 2.20lbs
with cubed foam: 1,35kg - 2.97lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

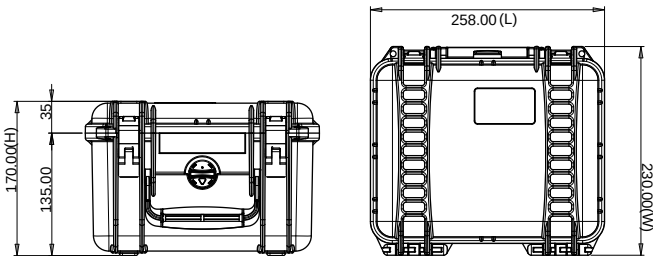





BROMPTON

BROMPTON

HPRC READY MADE SOLUTIONS – 2025

HPRC4800W for Brompton

BRO4800W-01



1 Brompton Bike

2 Accessories

TECHNICAL FEATURES

Dimension:

internal dimension
720x320x600(mm) - 28.34x12.60x23.62(in)
external dimension
776x380x649(mm) - 30.55x14.96x25.55(in)

Weight:


empty: 10,00kg - 22.21lbs
with foam: 11,60kg - 25.57lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F



TECHNICAL DRAWING

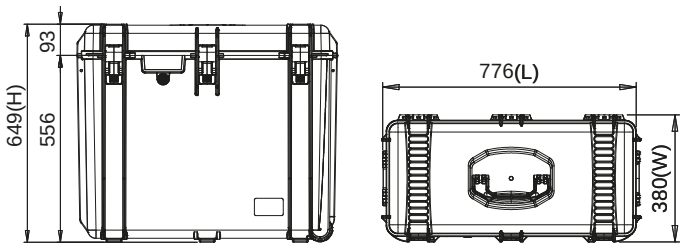

code	description	page
	DJI	4
S-MAV3P-2400-02	HPRC2400 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO	5
S-MAV3PFM-2600-01	HPRC2600 FOR DJI MAVIC3 PRO CINE PREMIUM COMBO FLYING MODE & DJI MINI 4 PRO FLY MORE COMBO	6
S-MAV3P-3500-01	HPRC3500 FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO	7
S-MAV3PBAG35	HPRC SOFT BAG FOR DJI MAVIC 3 PRO CINE PREMIUM COMBO / FLY MORE COMBO	8
MAV3-2400-01	HPRC2400 FOR DJI MAVIC3 CINE OR DJI MAVIC3	9
MAV3-3500-01	HPRC3500 FOR DJI MAVIC3 CINE OR DJI MAVIC3	10
MAVBAG35-05	HPRC SOFT BAG WITH FOAM FOR DJI MAVIC3 CINE OR DJI MAVIC3	11
S-M350-2800W-03	HPRC FOR DJI MATRICE 350 RTK (ZENMUSE H30/H30T VERSION)	12
S-M300-2800W-04	HPRC FOR DJI MATRICE 300 RTK (ZENMUSE H30/H30T VERSION)	13
BAT2550W-04	HPRC2550W BATTERY CASE FOR DJI MATRICE 300/350	14
DRTK6500W-01	HPRC6500W FOR DJI D-RTK2	15
S-M3TD-2710-01	HPRC2710 FOR DJI MATRICE 3D/3TD	16
M30T-5200R-01	HPRC5200R FOR DJI MATRICE 30T	17
M30T-2760W-01	HPRC2760W FOR DJI MATRICE 30T	18
M30T-2700W-01	HPRC2700W FOR DJI MATRICE 30T	19
BAT2460-01	HPRC2460 FOR BATTERIES TB30 AND DJI RC PLUS	20
S-RCP-2500-01	HPRC2500 FOR DJI RC PLUS CONTROLLERS AND WB37 BATTERIES	21
S-INS3-2800W-01	HPRC2800W FOR DJI INSPIRE 3	22
S-BAT2550W-05	HPRC2550W FOR INSPIRE 3 BATTERIES	23
S-MAVM-2300-04	HPRC2300 FOR DJI MINI 4 PRO FLY MORE COMBO WITH SMART CONTROLLER	24
S-NEO-2300-01	HPRC2300 FOR DJI NEO FLY MORE COMBO	25
S-MAV3A-2400-02	HPRC2400 FOR DJI AIR 3 /AIR 3S FLY MORE COMBO	27
S-MAV3A-3500-01	HPRC3500 FOR DJI AIR 3 /AIR 3S FLY MORE COMBO	28
S-AVAT2-2500-01	HPRC2500 FOR DJI AVATA 2 FLY MORE COMBO	29
S-AVAT2-3500-01	HPRC3500 FOR DJI AVATA 2 FLY MORE COMBO	30
AVAT-2500-01	HPRC2500 FOR DJI AVATA PRO - VIEW COMBO	31
AVAT-3500-01	HPRC3500 FOR DJI AVATA PRO - VIEW COMBO	32
FPV-2500-01	HPRC2500 FOR DJI FPV COMBO	33
FPV-3600-01	HPRC3600 FOR DJI FPV COMBO	34
PHA4RTK-2700W-01	HPRC2700W FOR DJI PHANTOM 4RTK / MULTISPECTRAL	35
R4D-2730W-01	HPRC2730W FOR DJI RONIN 4D-6K COMBO	36
S-RS4-2600-01	HPRC2600 FOR DJI RS 4 PRO COMBO	37
RS3-2600-01	HPRC2600 FOR DJI RS 3 PRO COMBO	38
RS3M-2300-01	HPRC2300 FOR DJI RS 3 MINI CREATOR COMBO	39
OSMPKT-1400-02	HPRC1400 FOR DJI POCKET 2 CREATIVE COMBO KIT	40
S-OSMPKT-1400-03	HPRC1400 FOR DJI OSMO POCKET 3 CREATOR COMBO	41
	AUTEL ROBOTICS	42
LITE-2460-01	HPRC2460 FOR AUTEL ROBOTICS EVO LITE + PREMIUM BUNDLE	43
NANO-2300-01	HPRC2300 FOR AUTEL ROBOTICS EVO NANO + PREMIUM BUNDLE	44
EVO2-2400-02	HPRC2400 FOR AUTEL ROBOTICS EVO II 6K / 8K DRONE - REV. 02	45

code	description	page
	ATOMOS	46
NJAV-2300-01	HPRC2300 FOR ATOMOS NINJA ULTRA, NINJA OR NINJA V	47
S-SHGC-2400-01	HPRC2400 FOR ATOMOS SHOGUN, SHOGUN ULTRA AND SHOGUN CONNECT	48
SM19-2730W-01	HPRC2730W FOR ATOMOS SUMO 19"	49
	BLACKMAGIC	50
PKT6P-2400-01	HPRC2400 FOR BLACKMAGIC POCKET CINEMA CAMERA 6K PRO OR BLACKMAGIC CINEMA CAMERA 6K	51
PKTC-2400-01	HPRC2400 COMBO FOR BLACKMAGIC POCKET CINEMA CAMERA 6K OR 4K + METABONES	52
S-BMS-5200-01	HPRC5200 FOR BLACKMAGIC STUDIO CAMERA 6K PRO/4K PRO G2/4K PLUS	53
S-ATS-2760W-01	HPRC2760W FOR BLACKMAGIC DESIGN ATEM TELEVISION STUDIO 4K8 /HD8 /HD8 ISO + ATEM MICROPHONE CONVERTER	54
S-ACCP-2710-01	HPRC2710 FOR BLACKMAGIC DESIGN ATEM CAMERA CONTROL PANEL	55
AMI-2300-01	HPRC2300 FOR ATEM MINI, ATEM MINI PRO AND ATEM MINI PRO ISO	56
AME-2500-01	HPRC2500 FOR ATEM MINI EXTREME AND ATEM MINI EXTREME ISO	57
ADV1-2710-01	HPRC2710 FOR BLACKMAGIC DESIGN ATEM 1 M/E ADVANCED PANEL	58
URS2730W-03	HPRC2730W FOR BLACKMAGIC URSA MINI PRO - URSA BROADCAST	59
	SONY	60
ALP2460-01	HPRC2460 SPECIAL EDITION FOR SONY ALPHA 7	61
FX3-2400-01	HPRC2400 FOR SONY FX3 CINEMA LINE	62
FX6-2550W-01	HPRC2550W PER SONY ILME-FX6 CINEMA LINE	63
FX9-2700W-01	HPRC2700W FOR SONY PXW-FX9 - CINEMA LINE	64
S-BRN-2700W-01	HPRC2700W FOR SONY BURANO 8K CAMERA - CINEMA LINE	65
S-FR7-4400-01	HPRC4400 FOR SONY ILME - FR7	66
S-IP500-2460-01	HPRC2460 FOR SONY IP500 PTZ CAMERA REMOTE CONTROLLER	67
Z280-2600W-01	HPRC2600W FOR SONY PXW-Z280	68
Z190-2700W-01	HPRC2700W FOR SONY PXWZ190V	69
	CANON	70
CR5-2300-01	HPRC2300 FOR CANON EOS R5 / R6	71
C300-2700W-01	HPRC2700W FOR CANON EOS C300 MARK III	72
C70-2600-01	HPRC2600 FOR CANON EOS C70	73
C200-2600-01	HPRC2600 FOR CANON EOS C200	74
C100-2600-01	HPRC2600 FOR CANON EOS C100	75
	MOZA	76
MAIR2-2530-01	HPRC2530 FOR MOZA AIR2 IFOCUS	77
	ZHIYUN CRANE	78
CR3-2700W-01	HPRC2700W FOR ZHIYUN CRANE 3 LAB MASTER PACKAGE	79
CR3-2600W-01	HPRC2600W FOR ZHIYUN CRANE 3 LAB	80
	Z CAM	82
ZE2F6-2400-01	HPRC2400 FOR Z CAM E2-F6 FULL FRAME 6K CINEMA CAMERA	83

Index

code	description	page
	FUJIFILM	84
GFX100-2500-01	HPRC2500 FOR FUJIFILM GFX100	85
	RED	86
RGE-2730W-01	HPRC2730W FOR RED RANGER GEMINI	87
	NIKON	88
D850-2460-01	HPRC2460 FOR NIKON D850 FILMMAKER'S KIT	89
	PANASONIC	90
S-GH52460-01	HPRC2460 SPECIAL EDITION FOR PANASONIC GH5 AND ACCESSORIES	91
	LEICA	92
LEM2400-01	HPRC2400 FOR LEICA M	93
LEM2460-01	HPRC2460 FOR LEICA M	94
	APPLE	96
STU-2530-01	HPRC2530 FOR APPLE MAC STUDIO / MAC MINI	97
MPRO-2530-01	HPRC2530 FOR MACBOOK PRO 16"	98
MPRO-4800W-01	HPRC4800W FOR APPLE MACPRO 2020	99
MPRO-2400-01	HPRC2400 FOR APPLE MACBOOK PRO 15"	100
	EIZO	102
EIZ27-4800W-01	HPRC4800W FOR EIZO MONITOR 27" AND EIZO MONITOR 24"	103
	UNIVERSAL MICROPHONES	104
MCF3-2200-01	HPRC2200 FOR 3 UNIVERSAL MICROPHONES	105
MCF6-2250-01	HPRC2250 FOR 6 UNIVERSAL MICROPHONES	106
	BROMPTON	108
BR04800W-01	HPRC4800W FOR BROMPTON FOLDING BIKE	109

READY









Plaber S.r.l. - HPRC cases

Via Div. Tridentina, 10
36061 Bassano del Grappa
Vicenza - Italy

Tel. +39 0424 809150

USA office and warehouse:

Plaber America Inc - HPRC cases

110 Chestnut Ridge Rd. #314
Montvale, NJ 07645

Tel. +1 (201) 989 3353

www.hprc.it | www.hprcusa.com

info@hprc.it

HPRC® Brand owned by:

plaber

HPRC READY MADE SOLUTIONS – 2025